


To 3rd Party HDMI Device To 3rd Party HDMI Device To 3rd Party S-Video Device To 3rd Party Composite Video Device

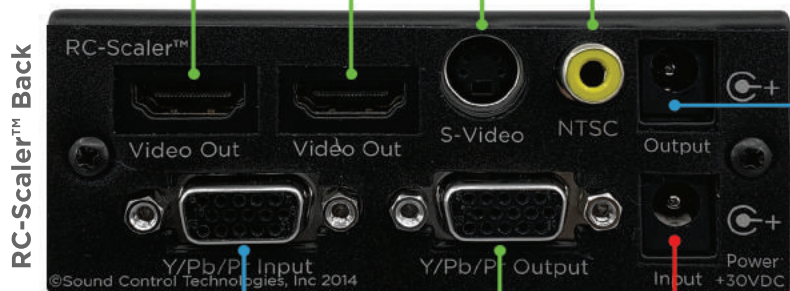

DA-001-0.3M
From RC2™ Kit
(Purchased Separately)
or
From 3rd Party
Y/Pb/Pr Device

To 3rd Party
Y/Pb/Pr Device

PPC-001-0.45M
Provides power to RC2-HE™ Module
(RC2-HE™ Module/RC2™ Kit
Purchased Separately)

 **WPS-12 30VDC**
100-240V 47-63Hz

Power Supply included in RC2™ Kit only.
(WPS-12 can be purchased separately.)

Please Note: Only [1] WPS-12 required to power both RC2™ Kit & RC-Scaler™ via PPC-001-0.45M.

Dip Switch Settings

1	S1 DOWN	S2 UP	S3 DOWN	S4 DOWN	Y/Pb/Pr Input Auto Output
2	S1 DOWN	S2 DOWN	S3 DOWN	S4 DOWN	Y/Pb/Pr Input Force 720p Output
3	S1 DOWN	S2 DOWN	S3 DOWN	S4 UP	Y/Pb/Pr Input Force 1080i Output
4	S1 DOWN	S2 DOWN	S3 UP	S4 DOWN	Y/Pb/Pr Input Force 1080p30 Output
5	S1 DOWN	S2 DOWN	S3 UP	S4 UP	Y/Pb/Pr Input Force 1080p60 Output
1	S1 UP	S2 UP	S3 DOWN	S4 DOWN	Pattern Generator Auto Output
2	S1 UP	S2 DOWN	S3 DOWN	S4 DOWN	Pattern Generator Force 720p Output
3	S1 UP	S2 DOWN	S3 DOWN	S4 UP	Pattern Generator Force 1080i Output
4	S1 UP	S2 DOWN	S3 UP	S4 DOWN	Pattern Generator Force 1080p30 Output
5	S1 UP	S2 DOWN	S3 UP	S4 UP	Pattern Generator Force 1080p60 Output

Module Dimensions

RC-Scaler™: 3.75"W x 1.5"H x 3.625"D