

Important: Due to the power demands of Poly's Director II, it is best practice to utilize SCT's provided **RC-RKM™** rack shelf to facilitate ventilation.


RCC-C030-0.4M
HDMI/RJ45 to Mini-HDCI Cable

RCC-C016-0.3M
Audio Cable
(Far-end reference for auto-tracking)



SCTLink™ Cable
Power, Control, Audio & Video
The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

SCTLink™ Cable Specs
Integrator-Supplied CAT5e/CAT6 STP/UTP Cable T568A or T568B (10m-100m min/max Length)

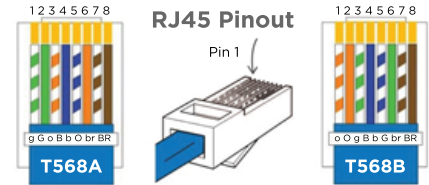

PPC-015-0.4M
Power Cable




WPS-48 48VDC
100-240V~47-63Hz
Power Supply

RCC-M001-1.0M
DB9 to DB9 RS232 Cable
(Purchased Separately)

RCC-H001-1.0M
HDMI Cable

Laptop
HDMI to USB Converter

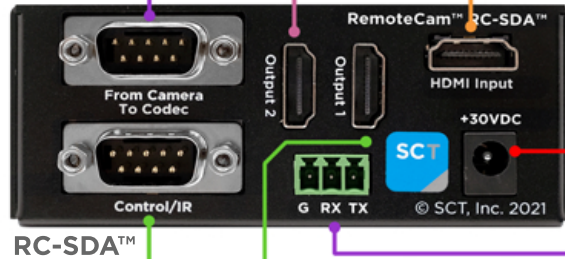

WPS-12 30VDC
100-240V 47-63Hz
Power Supply

RCC-M002-1.0M
DB9 to 3-Pin Plug
(Purchased Separately)

RCC-H030-1.0M*
HDCI to HDMI/9-Pin Cable
*supplied *only* with RC7-PD2™ kit.

Dipswitch Positions
Please refer to RC-SDA™ (2021) FAQ

Poly Supplied
Audio Cable #2457-69476-001
3.5mm Adapter #1517-09350-001

Poly RPG300, 500, 700 & 7500

Module Dimensions

RC7-CE™: H: 1.6" (40mm) x W: 6.48" (164mm) x D: 4.55" (115mm)

RC7-HE™: H: 1.6" (40mm) x W: 8.65" (219mm) x D: 4.55" (115mm)

RC-SDA™: H: 1.504" (38mm) x W: 3.813" (96mm) x D: 3.617" (91mm)

