



Poly EagleEye IV with Producer



Poly Provided Cable

RCC-C031-0.3M


HDCI Y Cable to HDMI/RJ45
(Supplied only with RC4 Producer™ Kit)

RCC-C029-0.3M

Power Cable for Producer Module
(Supplied only with RC4 Producer™ Kit)

Dipswitch Positions

Please refer to
RC-SDA™ (2021) FAQ

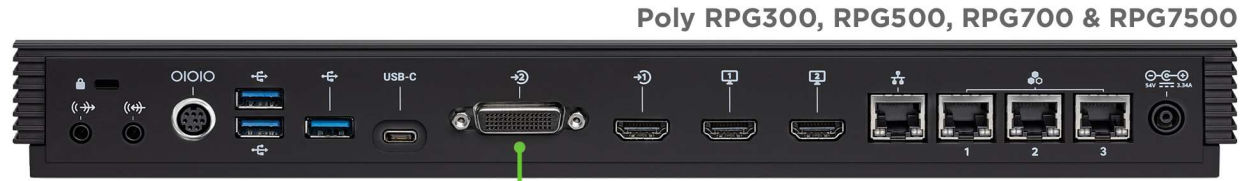

Poly RPG300, RPG500, RPG700 & RPG7500

RCC-H030-1.0M


HDCI Y Cable to HDMI/9 Pin Cable
(Supplied only with RC4 Producer™ Kit)

RCC-M001-1.0M


DB9 to DB9 RS232

RCC-H001-1.0M

HDMI to HDMI Cable

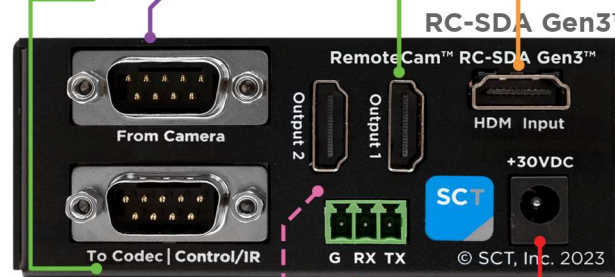

RC-SDA Gen3™

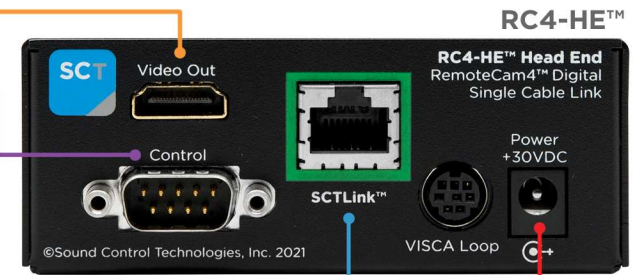

RC4-HE™

SCTLink™

WPS-12 30VDC
100-240V 47-63Hz
Power Supply

WPS-12 30VDC
100-240V 47-63Hz
Power Supply




HDMI to USB Converter



Laptop

RCC-M002-1.0M
3-Pin Phoenix to DB9-F

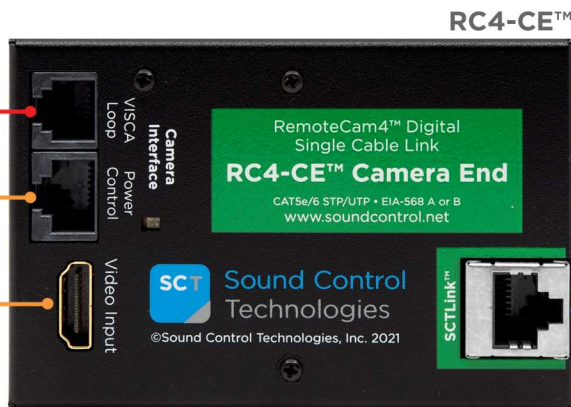

RC4-CE™

RemoteCam4™ Digital Single Cable Link
RC4-CE™ Camera End


CAT5e/6 STP/UTP • EIA-568 A or B
www.soundcontrol.net

Sound Control Technologies
©Sound Control Technologies, Inc. 2021

SCTLink™ Cable

Power, Control, Audio & Video
The SCTLink™ cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

SCTLink™ Cable Specs
Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
T568A or T568B (10m-100m min/max Length)



Module Dimensions

RC4-CE™: H: 0.93" (23mm) x W: 2.5" (63mm) x D: 3.741" (95mm)

RC4-HE™/RC-SDA™: H: 1.504" (38mm) x W: 3.813" (96mm) x D: 3.617" (91mm)