


Important: Due to the power demands of Poly's Director II, it is best practice to utilize SCT's provided **RC-RKM™** rack shelf to facilitate ventilation.

RCC-C030-0.4M
Mini-HDCI Y Cable to HDMI/RJ45
(Supplied *only* with RC7-PD2™ Kit)

RCC-C016-0.3M Audio Cable
(Far-end reference for auto-tracking)
(Supplied *only* with RC7-PD2™ Kit)

SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
T568A or T568B (10m-100m min/max Length)

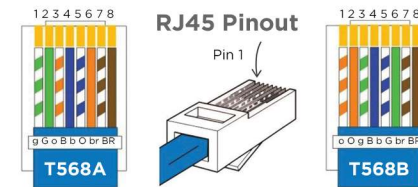

SCTLink™ Cable

Power, Control, Audio & Video

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.



RC7-CE™
PPC-015-0.4M
Power Cable
(Supplied *only* with RC7-PD2™ Kit)

WPS-48 48VDC
100-240V~47-63Hz
Power Supply




RC7-HE™
RCC-H001-1.0M
HDMI to HDMI Cable

Laptop
HDMI to USB Converter

RCC-M001-1.0M
DB9 to DB9 RS232 Cable

WPS-12 30VDC
100-240V 47-63Hz
Power Supply

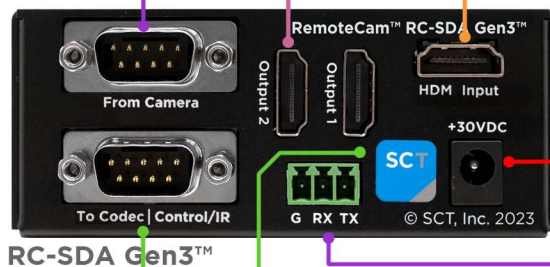

RCC-M002-1.0M
3-Pin Phoenix to DB9-F

RCC-H030-1.0M
HDCI to HDMI/9-Pin Cable
(Supplied *only* with RC7-PD2™ Kit)

Dipswitch Positions
Please refer to
RC-SDA™ (2021) FAQ

Poly Supplied
Audio Cable #2457-69476-001
3.5mm Adapter #1517-09350-001

Poly RPG300, 500, 700 & 7500

Module Dimensions

RC7-CE™: H: 1.6" (40mm) x W: 6.48" (164mm) x D: 4.55" (115mm)
RC7-HE™: H: 1.6" (40mm) x W: 8.65" (219mm) x D: 4.55" (115mm)
RC-SDA™: H: 1.504" (38mm) x W: 3.813" (96mm) x D: 3.617" (91mm)

