


The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

### SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable  
T568A or T568B (10m-100m min/max Length)

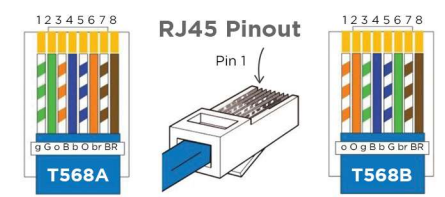

### Module Dimensions

**RC4-CE™:** H: 0.93" (23mm) x W: 2.5" (63mm) x D: 3.741" (95mm)  
**RC-SDA4+HE™:** H: 1.28" (33mm) x W: 9.47" (241mm) x D: 4.88" (124mm)