





Cisco Precision 60

PPC-003-0.4M
DC Power Cable

RCC-C002-0.3M
RJ45 to RJ45
UTP Control Cable

RCC-C001-0.4M
HDMI to HDMI
Video Cable

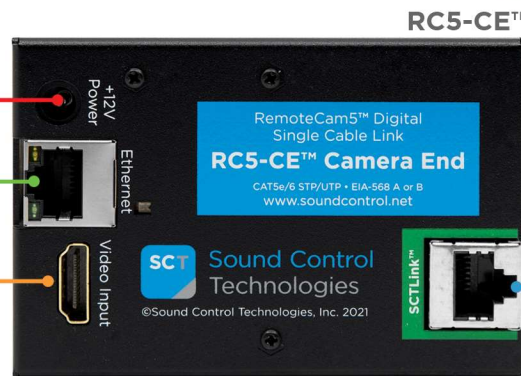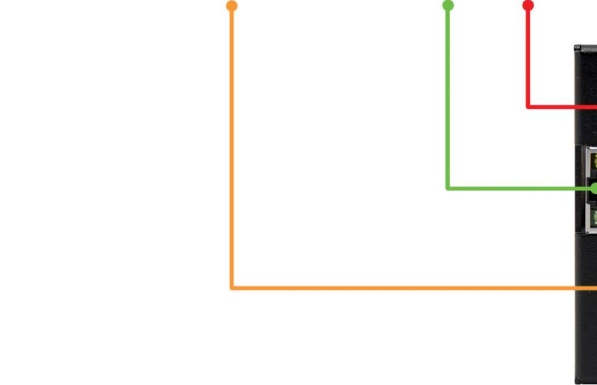

3rd Party RS232 Controller



WPS-12 30VDC
100-240V 47-63Hz
Power Supply

RCC-M005-1.0M
USB-A to USB-C

RCC-M003-1.0M
USB-A to USB-A


SCTLink™ Cable
Power, Control & Video
The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

RCC-H001-1.0M
HDMI to HDMI
Video Cable

RCC-H016-1.0M
RJ45 to RJ45
UTP Control Cable

SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
T568A or T568B (10m-100m min/max Length)

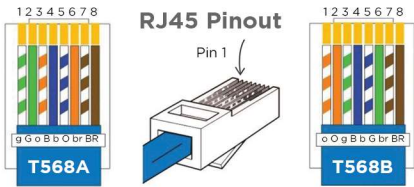

Module Dimensions

RC5-CE™: H: 0.93" (23mm) x W: 2.5" (63mm) x D: 3.741" (95mm)

RC-SDA5+HE™: H: 1.28" (33mm) x W: 9.47" (241m) x D: 4.88" (124mm)

Cisco SX80, Codec Plus, Codec Pro, Codec EQ, Room Bar & Room Bar Pro