



Poly EagleEye IV with Producer



*Polycom Provided Cable

RCC-C031-0.3M


HDMI/RJ45 to HDCI Cable

RCC-C029-0.3M

Power Cable for Producer Module

Dipswitch Position for use with Poly Codec

1 2 3 4



Note: S1 on front of RC-SDA™ will reset tracking mode ON.





RCC-H030-1.0M*

HDCI to HDMI/9 Pin Cable

*supplied only with RC4 Producer™ kit.

RCC-M001-1.0M
DB9 to DB9 RS232

RCC-H001-1.0M
HDMI Cable

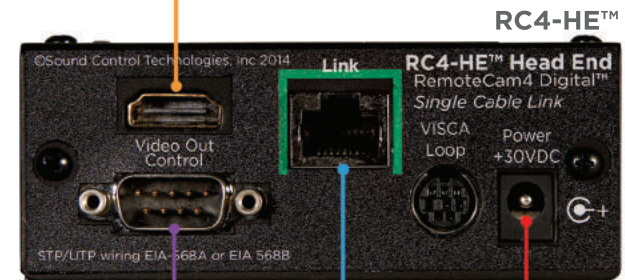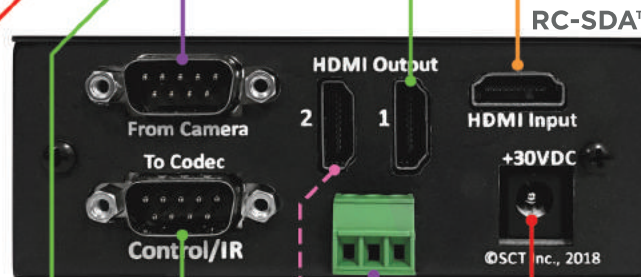

WPS-12 30VDC
100-240V 47-63Hz
Power Supply


WPS-12 30VDC
100-240V 47-63Hz
Power Supply

RCC-M002-1.0M
DB9 to 3 Pin Plug

HDMI to USB Converter



Laptop

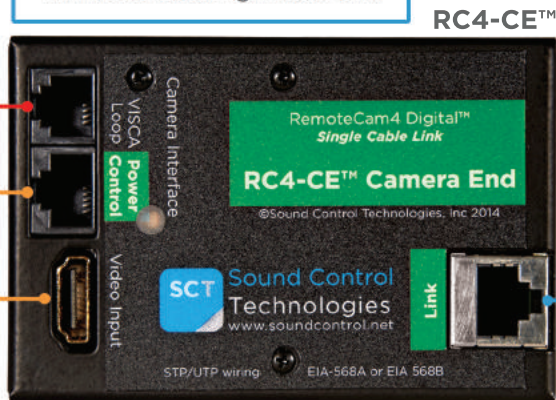



SCTLink™ Cable

Power, Control, Audio & Video

The SCTLink™ cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable EIA568A or EIA568B (10m-100m min/max Length)



Module Dimensions

RC4-CE™: 2.5" W x 0.875"H x 3.6875"D

RC4-HE™/RC-SDA™: 3.75"W x 1.5"H x 3.625"D