
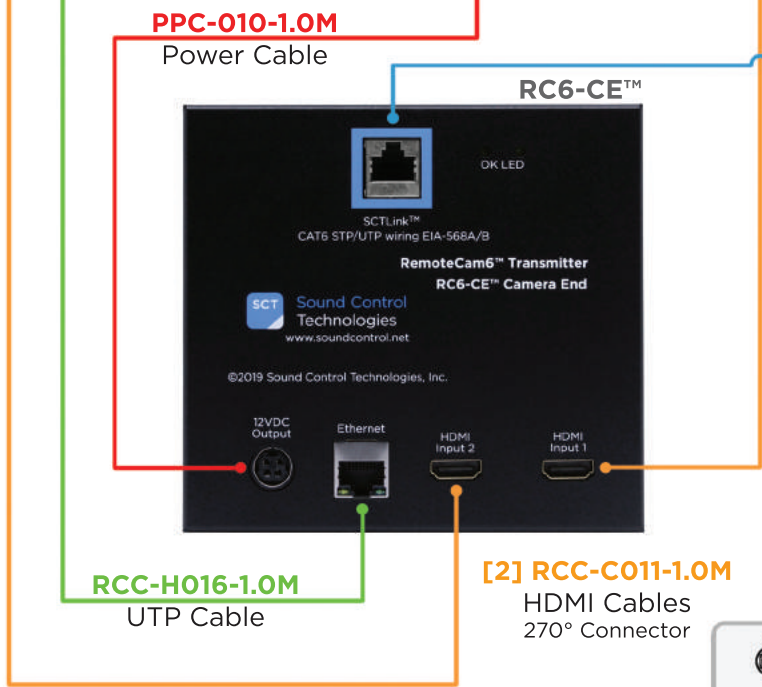


**Important:** Due to the power demands of Cisco's SpeakerTrack 60, it is best practice to utilize SCT's provided **RC-RKL™** rack shelf to facilitate ventilation.


**Cisco SpeakerTrack 60**

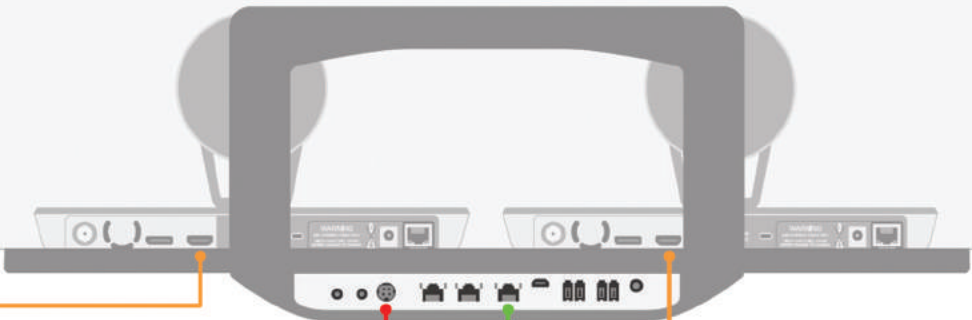


**SCTLink™ Cable**  
Power, Control & Dual Video  
The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

**WPS-48 48VDC**  
100-240V~47-63Hz  
Power Supply

**SCTLink™ Cable Specs**  
Integrator-Supplied CAT5e/CAT6 STP/UTP Cable  
EIA568A or EIA568B (10m-100m min/max Length)

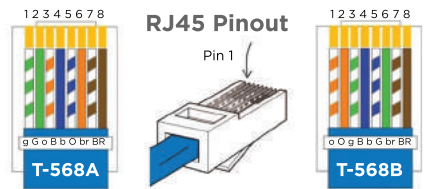


**RCC-H016-1.0M**  
UTP Cable

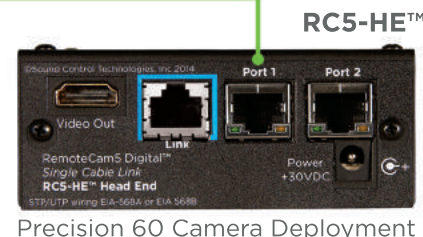

**RCC-H016-1.0M**  
UTP Cable

**[2] RCC-H001-1.0M**  
HDMI Cables

**Cisco Codec Plus/Pro**  
SX80, C40, C60 & C90

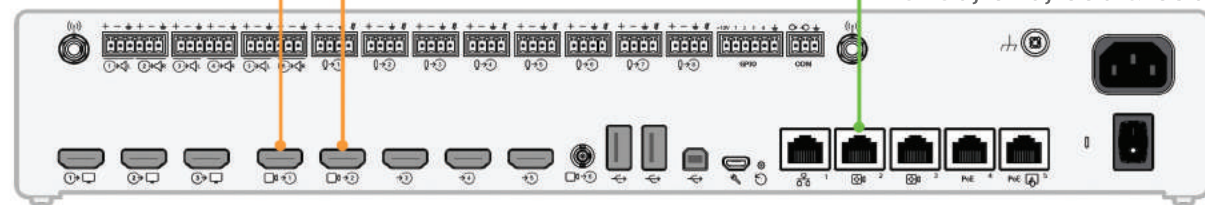

**Module Dimensions**  
RC6-CE™: 4.875"H x 5.25"W x 1.0625"D  
RC6-HE™: 1.375"H x 7.3125"W x 5.3125"D