



Sony BRC-X1000 & BRC-H800

RCC-C001-0.3M
HDMI to HDMI Video Cable

RCC-C002-0.3M
RJ45 to RJ45 UTP Control Cable

PPC-030-1.0M
6.5x3mm DC Plug to EIAJ-IV DC Plug Power Cable

WPS-48 48VDC
100-240V-47-63Hz Power Supply



Sony RM-IP10 Joystick HDMI


Sony Power Supply

RCC-H016-1.0M
RJ45 to RJ45 UTP Control Cable

RCC-H001-1.0M
HDMI to HDMI Video Cable




HDMI/DVI Device

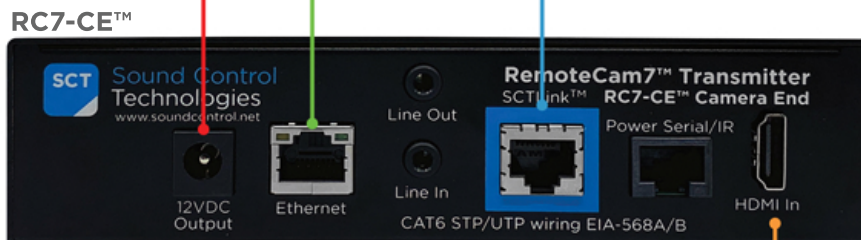

SCTLInk™ Cable
Power, Control, Audio & Video
The **SCTLInk™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

SCTLInk™ Cable Specs
Integrator-Supplied CAT6 STP/UTP Cable
T568A or T568B (10m-100m min/max Length)

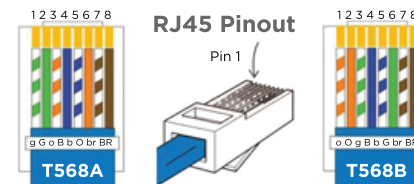

Module Dimensions

RC7-CE™: H: 1.6" (40mm) x W: 6.48" (164mm) x D: 4.55" (115mm)

RC7-HE™: H: 1.6" (40mm) x W: 8.65" (219mm) x D: 4.55" (115mm)