

The **RCU2-B20™** supports multiple camera models:

- 1Beyond AutoFinder & AutoFramer
- AVer Cam 520 Pro & Pro 2
- AVer Cam 520 Pro Advanced
- Huddlecams HC12X & HC20X



Shown:
AVer CAM520 Pro




RCC-M004-1.0M

USB-B (RCU2-HE™) to USB-A



Laptop

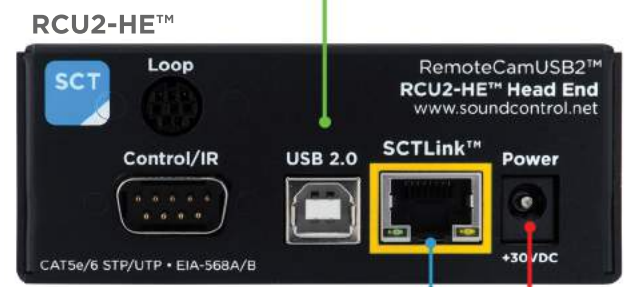

RCU2-HE™

RCC-M004-0.3M
USB-A (RCU2-CE™) to USB-B

PPC-022-0.3M
RJ11 (RCU2-CE™)
to 5.5mm x 2.1mm Barrel




RCU2-CE™

SCTLink™ Cable
Power, Control & Video

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

WPS-12 30VDC
100-240V 47-63Hz
Power Supply

SCTLink™ Cable Specs
Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
T568A or T568B (100m Max Length)

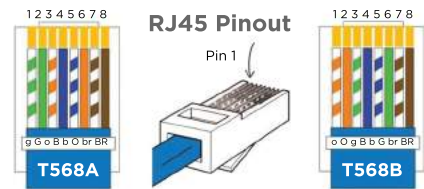

Module Dimensions
RCU2-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)
RCU2-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)

