

The **RCU2-B2A8™** supports multiple camera models:

- AVer Cam 520 Pro & Pro 2
  - AVer Cam 520 Pro Advanced
  - AVer VC 520 Pro & Pro 2
  - 1Beyond AutoFinder & AutoFramer\*
  - Huddlecams HC12X & HC20X\*
- \* AVer COMPRO232 Not Required




**RCC-M004-0.3M**  
USB-A (RCU2-CE™) to USB-B

**RCC-C005-0.3M**  
RJ45 (RCU2-CE™)  
to 8-Pin Mini (AVer COMPRO232)  
to EIAJ-4 Barrel (Unused)

**AVer COMPRO232**  
AVer-Supplied Adaptor Cable  
8-Pin Mini-Din (RCC-C005-0.5M)  
to 9-Pin Mini-Din (Adaptor Cable)

**PPC-022-0.3M**  
RJ11 (RCU2-CE™)  
to 5.5mm x 2.1mm Barrel


**RCC-M004-1.0M**  
USB-B (RCU2-HE™) to USB-A

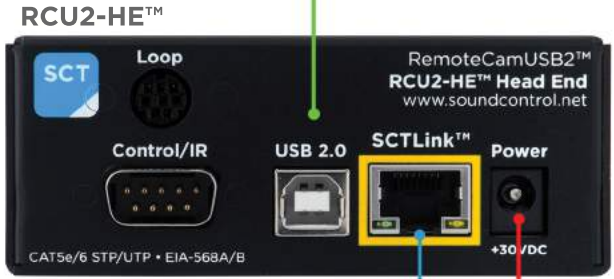


**SCTLink™ Cable**  
Power, Control & Video

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

**WPS-12 30VDC**  
100-240V 47-63Hz  
Power Supply

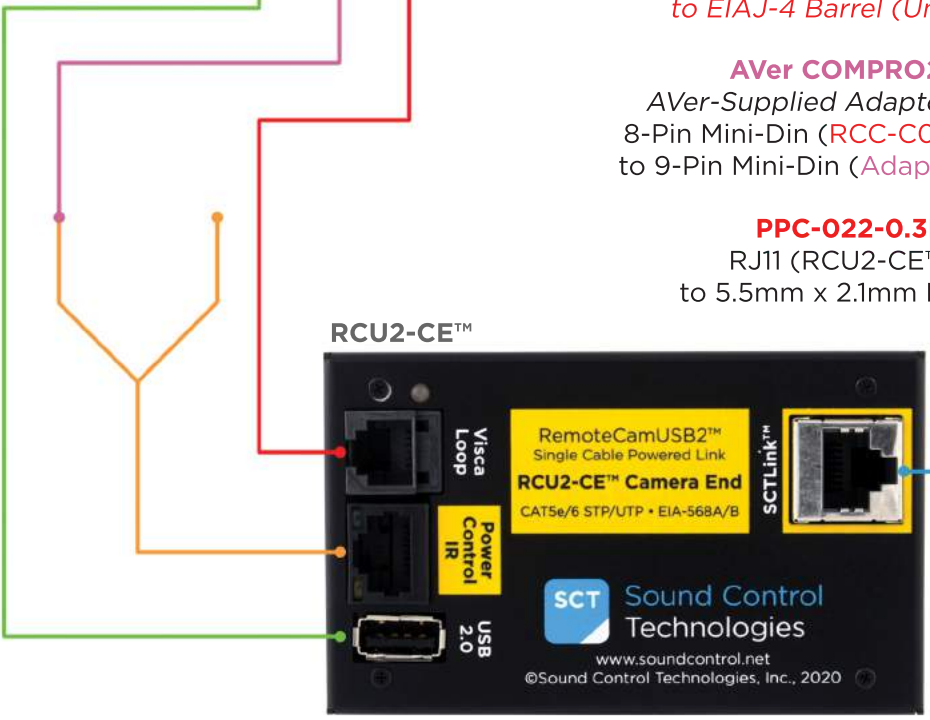

**SCTLink™ Cable Specs**  
Integrator-Supplied CAT5e/CAT6 STP/UTP Cable  
T568A or T568B (100m Max Length)

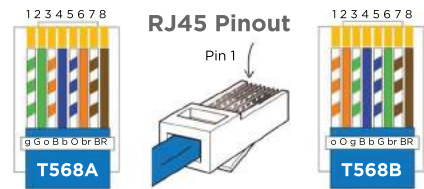

**Module Dimensions**  
RCU2-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)  
RCU2-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)