


The **RCU2-BA8™** supports multiple camera models:

- ClearOne Unite 150
- Huddlecam HC20X
- Minrray UV950A
- VDO360 Saber20X NDI
- VHD VX110
- ClearOne Unite 200
- Huddlecam HC30X
- PTZ Optics 12X USB
- VDO360 CompassX
- VHD VX710N
- Huddlecam HC10X-GY
- Lumens VC-B30U
- PTZ Optics 20X USB
- VHD V71U2
- VHD VX701L
- Huddlecam HC20X-GY/WH
- Marshall CV610-UB
- Sony SRG-120DU
- VHD V20C
- VHD VX120

Shown: **ClearOne Unite 200**

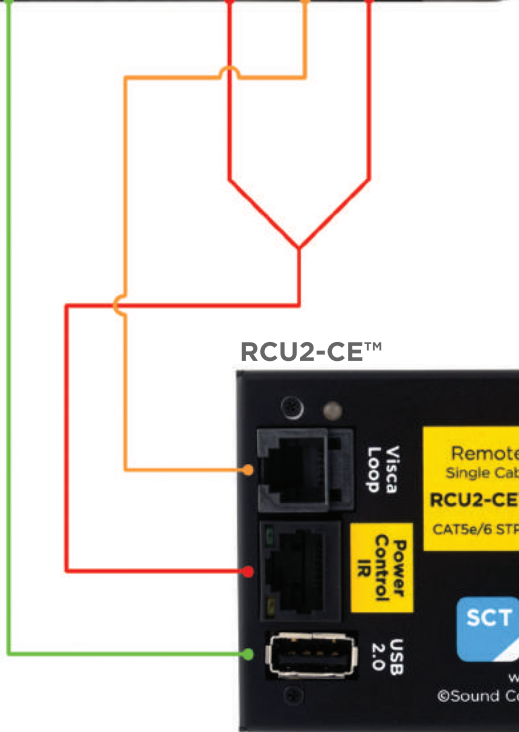


**RCC-M004-0.3M**  
USB-A (RCU2-CE™) to USB-B

**RCC-C005-0.3M**  
RJ45 (RCU2-CE™) Y Cable to 4mm Power Barrel to 8 Pin Mini Din

**RCC-C006-0.4M\***  
RJ11 (RCU2-CE™) to 8 Pin Mini Din  
*\*Purchased Separately:  
Cable required for VISCA Loop or Daisy Chain Functionality*

**RCC-M004-1.0M**  
USB-B (RCU2-HE™) to USB-A

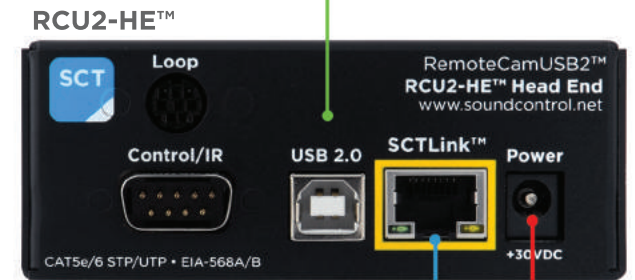


Laptop

**SCTLink™ Cable**  
Power, Control & Video

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

**SCTLink™ Cable Specs**

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable  
T568A or T568B (100m Max Length)

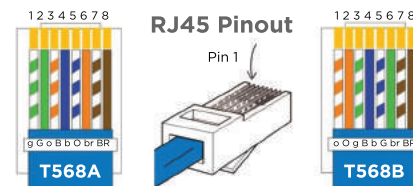

**WPS-12 30VDC**  
100-240V 47-63Hz  
Power Supply



**Module Dimensions**

**RCU2-CE™:** H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)  
**RCU2-HE™:** H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)