



Aver TR311HN

**RCC-M004-1.0M**  
USB-B (RCU2-HE™) to USB-A




Laptop

**RCC-M005-0.3M**  
USB-A (RCU2-CE™) to USB-C

**RCC-C005-0.3M**  
RJ45 (RCU2-CE™)  
to EIAJ-4 Barrel Connector  
to 8-Pin Mini (Aver **COMPRO232**)

**Aver COMPRO232**  
Aver-Supplied Adaptor Cable  
8-Pin Mini-Din (**RCC-C005-0.5M**)  
to 9-Pin Mini-Din (**Adaptor Cable**)

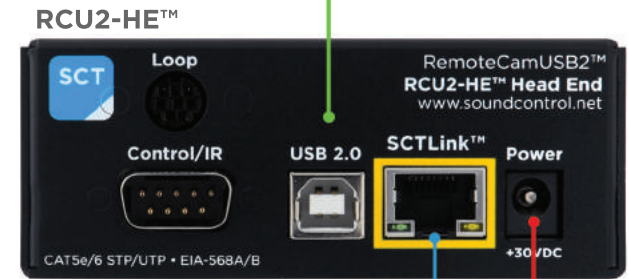

**SCTLink™ Cable**  
Power, Control & Video


The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

**WPS-12 30VDC**  
100-240V 47-63Hz  
Power Supply



### SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable  
T568A or T568B (100m Max Length)



### Module Dimensions

RCU2-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)

RCU2-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)

