



Poly EagleEye Cube

**RCC-M004-0.3M**

USB-A (RCU2-CE™) to USB-B [5VDC]


If USB is sole connection between the camera and RCU2-CE™, then **up to** 1.2 Amperes/6 Watts is supported.



Laptop

**RCC-M004-1.0M**

USB-B (RCU2-HE™) to USB-A

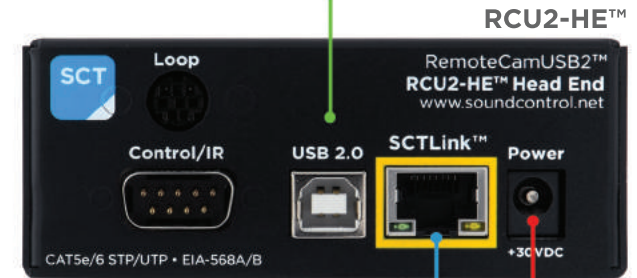

**SCTLink™ Cable**


Power, Control & Video

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

**WPS-12 30VDC**  
100-240V 47-63Hz  
Power Supply

**SCTLink™ Cable Specs**

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable  
T568A or T568B (100m Max Length)

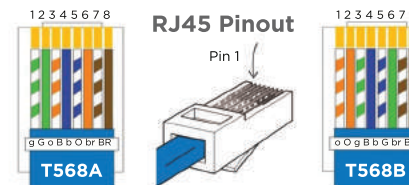

**Module Dimensions**

RCU2-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)

RCU2-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)

