




Aver PTZ310 & PTZ330

**RCC-M004-1.0M**  
USB-B (RCU2-HE™) to USB-A



Laptop

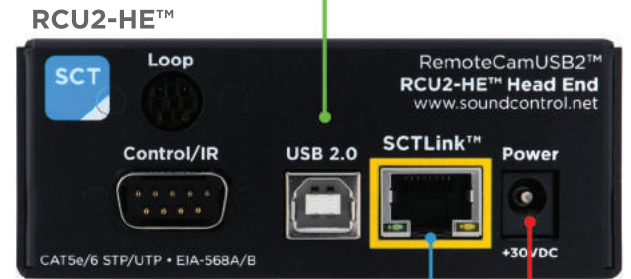

**RCC-M006-0.3M**  
USB-A (RCU2-CE™) to USB Micro-B


**RCC-C005-0.3M**  
RJ45 (RCU2-CE™) to 8-Pin Mini-Din to EIAJ-4 Barrel



**SCTLINK™ Cable**  
Power, Control & Video  
The **SCTLINK™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

**WPS-12 30VDC**  
100-240V 47-63Hz  
Power Supply

**SCTLINK™ Cable Specs**  
Integrator-Supplied CAT5e/CAT6 STP/UTP Cable  
T568A or T568B (100m Max Length)

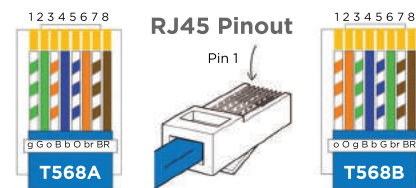

### Module Dimensions

RCU2-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)

RCU2-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)

