



The **RCU2S-A10™** supports multiple camera models:

- Atlona HDVS-CAM
- Atlona HDVS-CAM-HDMI
- Lumens VC-TR1
- Minnray UV401A
- Minnray UV570
- Minnray UV540
- VHD V60UL/V61UL/V63UL
- VHD V60CL/V61CL/V63CL




Shown: **Lumens VC-TR1**

3.5mm Audio Cable
Integrator-Supplied

RCC-M003-0.3M
USB-A (RCU2S-CE™)
to USB-A

PPC-023-0.3M
RJ11 (RCU2S-CE™)
to EIAJ-4 Barrel

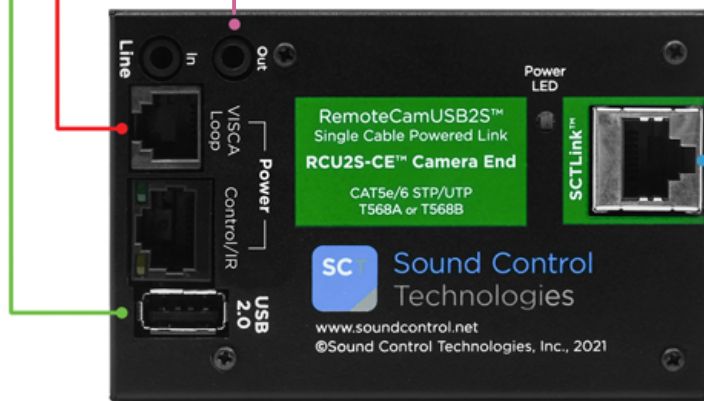

RCU2S-CE™

Module Dimensions

RCU2S-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)


RCU2S-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)

RCU2S-HE™ Front Panel
Field-Upgradeable microSD Slot

RCC-M004-1.0M
USB-B (RCU2S-HE™)
to USB-A



Laptop

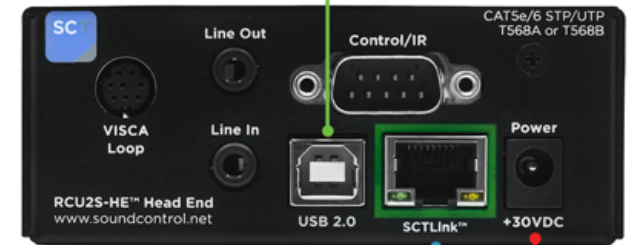

RCU2S-HE™

SCTLINK™ Cable
Power, Control & Video

The **SCTLINK™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

WPS-12 30VDC
100-240V 47-63Hz
Power Supply



SCTLINK™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
T568A or T568B (100m Max Length)

