




The **RCU2S-AA8™** supports multiple camera models:

- Atlona HDVS-CAM
- Atlona HDVS-CAM-HDMI
- Lumens VC-TR1
- Minnray UV401A
- Minnray UV570
- Minnray UV540
- VHD V60UL/V61UL/V63UL
- VHD V60CL/V61CL/V63CL



Shown: **Lumens VC-TR1**

3.5mm Audio Cable
Integrator-Supplied

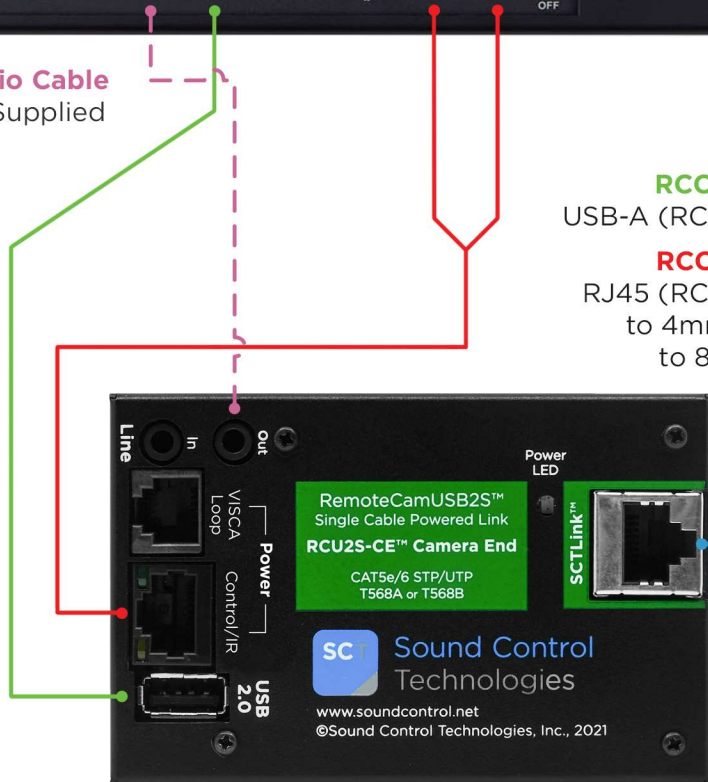

RCU2S-CE™

Laptop
RCC-M014-1.0M or **RCC-M004-1.0M**
USB-B (RCU2S-HE™) to USB-C

RCC-M003-0.3M
USB-A (RCU2S-CE™) to USB-A
RCC-C005-0.3M
RJ45 (RCU2S-CE™) Y Cable
to 4mm Power Barrel
to 8 Pin Mini Din

RCU2S-HE™ Front Panel
Field-Upgradeable microSD Slot



Generic Controller

RCC-H010-1.0M or **RCC-H013-1.0M**
Control Cable
Purchased Separately



RCU2S-HE™

SCTLink™ Cable
Power, Control & Video
Refer to the RCU2S data sheet for cable specifications

WPS-12 30VDC
100-240V 47-63Hz
Power Supply



Module Dimensions

RCU2S-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)

RCU2S-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)