

The **RCU2S-B00™** supports multiple camera models:

- Avaya HC020
- Avonic AV-CM22-VCU
- ClearOne Unite 50
- Huddlecam HC-EPTZ-USB
- Lumens VC-B10U
- Minrray MG200C
- StarLeaf Camera C10
- VHD JX1700U

**RCU2S-HE™ Front Panel**  
Field-Upgradeable microSD Slot

Shown: **ClearOne Unite 50**




**RCC-M004-0.3M**

USB-A (RCU2S-CE™) to USB-B [5VDC]

If USB is sole connection between the camera and RCU2S-CE™, then **up to 1.2 Amperes/6 Watts** is supported.



**RCC-M004-1.0M**  
USB-B (RCU2S-HE™) to USB-A

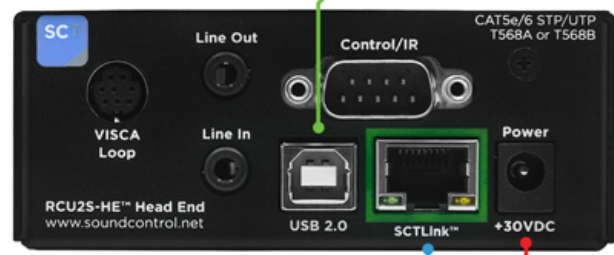

**RCU2S-HE™**



**Laptop**

**SCTLink™ Cable**  
Power, Control & Video

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

**WPS-12 30VDC**  
100-240V 47-63Hz  
Power Supply



**Module Dimensions**

**RCU2S-CE™:** H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)  
**RCU2S-HE™:** H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)

**SCTLink™ Cable Specs**

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable  
T568A or T568B (100m Max Length)

