


The **RCU2S-C00™** supports multiple camera models:

- Aver CAM 340+
- Jabra Panacast 3
- Lumens VC-B11U
- Poly X50 Device Mode
- Huddly IQ
- Logitech Rally Bar
- Panasonic AW-UE4
- Poly X70 Device Mode
- Huddly GO
- Logitech Rally Bar Mini
- Poly G7500 Codec
- VDO360 3SEE

Shown: **Poly G7500 Codec**




RCC-M005-0.3M
USB-A (RCU2S-CE™) to USB-C

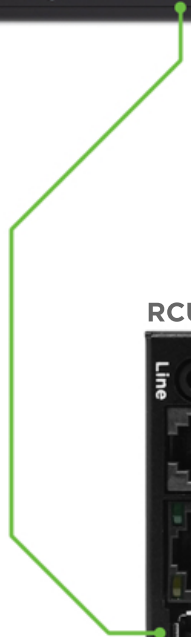

RCU2S-HE™ Front Panel
Field-Upgradeable microSD Slot

RCC-M004-1.0M
USB-B (RCU2S-HE™) to USB-A

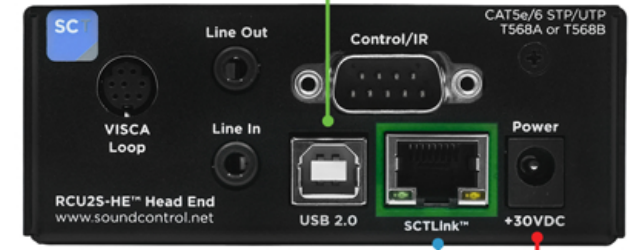

RCU2S-HE™

SCTLinK™ Cable
Power, Control & Video


The **SCTLinK™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

WPS-12 30VDC
100-240V 47-63Hz
Power Supply



SCTLinK™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
T568A or T568B (100m Max Length)

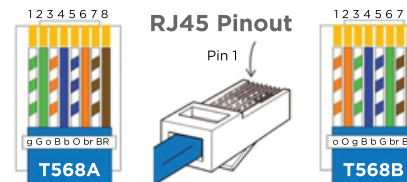

Module Dimensions

RCU2S-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)

RCU2S-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)