

The **RCU2S-C30™** supports multiple camera models:

- Panasonic AW-HE20
- Panasonic AW-UE20
- Panasonic AW-UE40
- Panasonic AW-UE50

Shown: **Panasonic AW-UE20**




**RCU2S-HE™ Front Panel**  
Field-Upgradeable microSD Slot

**RCC-M004-1.0M**  
USB-B (RCU2S-HE™) to USB-A



Laptop

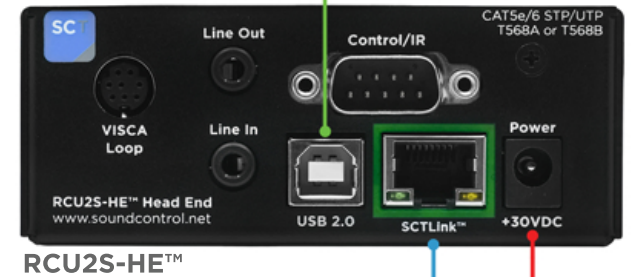

RCU2S-HE™

**RCC-C029-0.3M**  
RJ11 (RCU2S-CE™) to DC Plug

**RCC-M005-0.3M**  
USB-A (RCU2S-CE™) to USB-C



RCU2S-CE™


**SCTLink™ Cable**  
Power, UVC Control & Video  
The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

**WPS-12 30VDC**  
100-240V 47-63Hz  
Power Supply



**SCTLink™ Cable Specs**

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable  
T568A or T568B (100m Max Length)

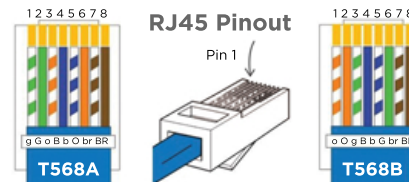

**Module Dimensions**

RCU2S-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)

RCU2S-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)