



## RCU2S-CA8™ USB Application Guide

Updated: 3/17/2022



Aver TR311HN & TR331

3.5mm Audio Cable  
Integrator-Supplied

RCC-M005-0.3M  
USB-A (RCU2S-CE™) to USB-C

RCC-C005-0.3M  
RJ45 (RCU2S-CE™)  
to EIAJ-4 Barrel Connector  
to 8-Pin Mini (Aver COMPRO232)


Aver COMPRO232  
Aver-Supplied Adaptor Cable  
8-Pin Mini-Din (RCC-C005-0.5M)  
to 9-Pin Mini-Din (Adaptor Cable)

RCU2S-HE™ Front Panel  
Field-Upgradeable microSD Slot

RCC-M004-1.0M  
USB-B (RCU2S-HE™)  
to USB-A



Laptop

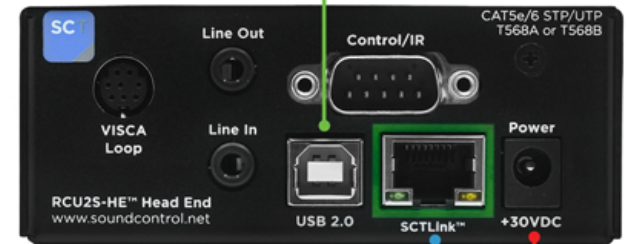

RCU2S-HE™

SCTLInk™ Cable  
Power, Control & Video

The SCTLInk™ cable must always be a single, point-to-point CAT cable with no couplers or interconnections.


WPS-12 30VDC  
100-240V 47-63Hz  
Power Supply



RCU2S-CE™

### SCTLInk™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable  
T568A or T568B (100m Max Length)



### Module Dimensions

RCU2S-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)

RCU2S-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)