



AVer CAM520 & CAM530



RCU2S-HE™ Front Panel
Field-Upgradeable microSD Slot

RCC-M004-1.0M
USB-B (RCU2S-HE™)
to USB-A




Laptop

RCC-C040-0.3M
RJ45 to 6-Pin Min-Din

RCC-M006-0.3M
USB-A (RCU2S-CE™)
to USB Micro-B

PPC-023-0.3M
RJ11 to EIAJ-4 DC Power Plug

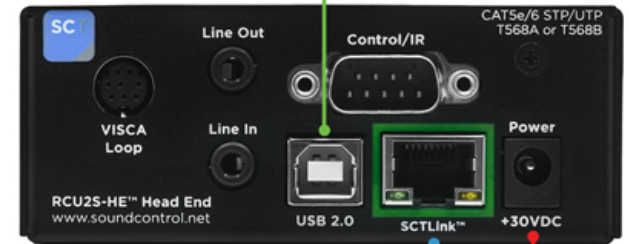

RCU2S-HE™




RCU2S-CE™

SCTLINK™ Cable
Power, Control & Video
The SCTLINK™ cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

SCTLINK™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
T568A or T568B (100m Max Length)

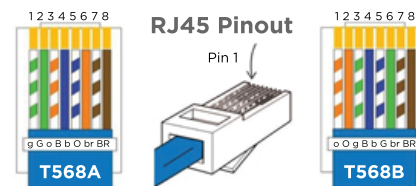

WPS-12 30VDC
100-240V 47-63Hz
Power Supply



Module Dimensions

RCU2S-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)

RCU2S-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)