



Poly EagleEyeIV USB

**PPC-013-0.4M**  
RJ11 (RCU2S-CE™) to right angle  
5.5 x 2.5mm COAX  
(Center Negative COAX)

**RCC-M004-0.3M**  
USB-A (RCU2S-CE™) to USB-B




RCU2S-CE™



Laptop

**RCC-M004-1.0M**  
USB-B (RCU2S-HE™) to USB-A

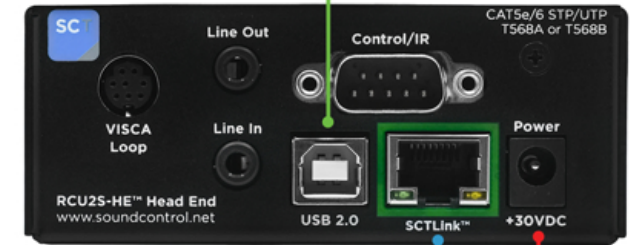

RCU2S-HE™

**RCU2S-HE™ Front Panel**  
Field-Upgradeable microSD Slot


**SCTLink™ Cable**  
Power, Control & Video

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

**WPS-12 30VDC**  
100-240V 47-63Hz  
Power Supply

### SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable  
T568A or T568B (100m Max Length)

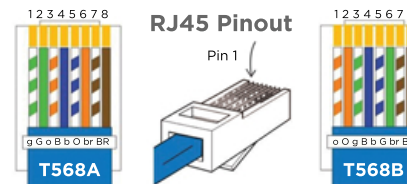

### Module Dimensions

RCU2S-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)

RCU2S-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)

