




Poly Studio E70


RCC-M005-0.3M  
USB-A (RCU2S-CE™) to USB-C

PPC-033-0.3M  
RJ11 (RCU2S-CE™) to 5.5mm x 2.5mm DC Plug

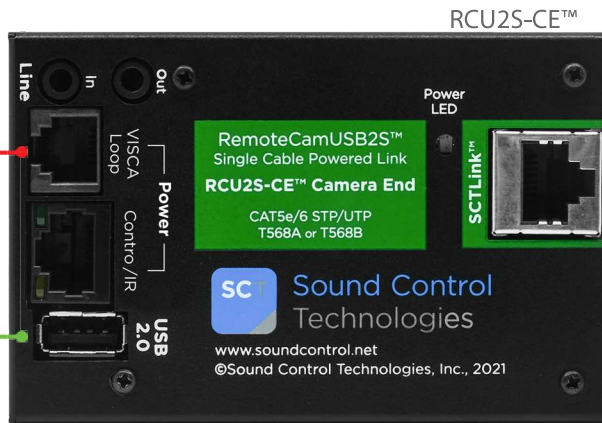

RCU2S-CE™

SCTLink™ Cable Specs  
Integrator-Supplied CAT5e/CAT6 STP/UTP Cable  
T568A or T568B (100m Max Length)

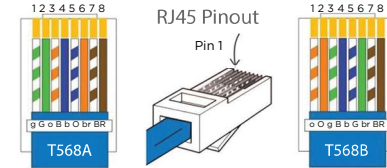

RCU2S-HE™ Front Panel  
Field-Upgradeable microSD Slot



RCU2S-HE™

SCTLink™ Cable  
Power, Control & Video

The SCTLink™ cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

WPS-12 30VDC  
100-240V 47-63Hz  
Power Supply



RCC-M004-1.0M  
USB-B (RCU2S-HE™) to USB-A



Poly G7500

If running in Zoom™ native mode please ensure the latest Zoom APK (overlaid) software is installed after updating to the latest Poly software.

### Module Dimensions

RCU2S-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)

RCU2S-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)