





Cisco Codec Pro, Room Kit Pro & Dual 70 G2 Codecs

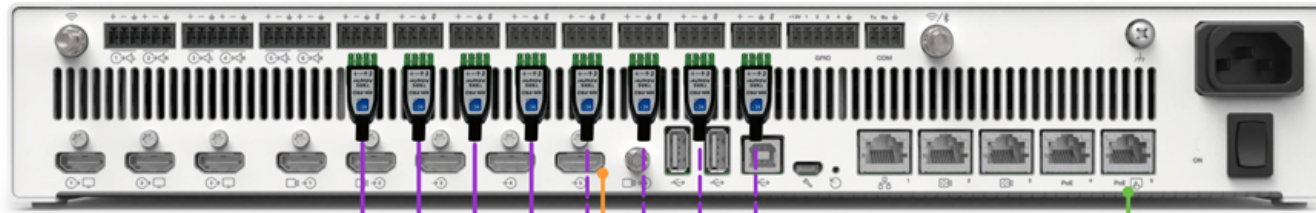

SCTLink™ Cable Specs

Integrator-Supplied CAT6 STP/UTP Cable
T568A or T568B (10m-100m min/max)

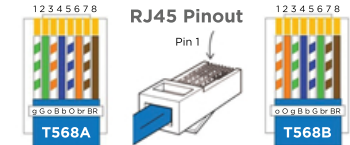

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.


RM-PRO-M™ Cable Bundle
Includes [4] Male TRRS to Male Euro-Block Cables
Additional bundle purchased separately

RCC-C001-0.3M
HDMI Video Cable

RCC-C002-0.3M
RJ45 UTP Control Cable



RTK-8CP-RX™ Receiver Module

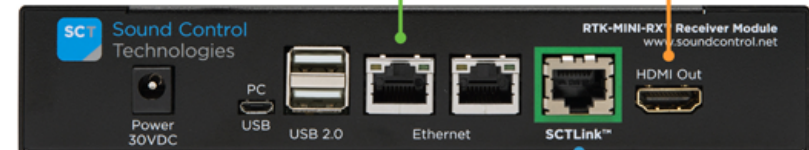

RTK-MINI-RX™ Receiver Module

SCTLink™ Cable

SCTLink™ Cable
Ethernet/POE | HDMI | USB

RTK-8CP-TX™ Transmitter Module



RTK-MINI-TX™ Transmitter Module



Up to [8] Cisco Table-E/Mic 60 Microphones

Can be used on Tx or Rx.

WPS-12 30VDC
100-240V 47-63Hz
Power Supply



Can be used on Tx or Rx.

WPS-12 30VDC
100-240V 47-63Hz
Power Supply



Cisco Touch10
Ethernet/POE

RCC-H016-1.0M
RJ45 Control Cable



Laptop

RCC-H001-1.0M
HDMI Video Cable

Module Dimensions

RTK-MINI-TX™: H: 1.394" (35mm) x W: 7.283" (185mm) x D: 4.484" (114mm)

RTK-MINI-RX™: H: 1.394" (35mm) x W: 7.283" (185mm) x D: 4.484" (114mm)

RTK-8CP-TX™: H: 1.394" (35mm) x W: 10.118" (256mm) x D: 4.484" (114mm)

RTK-8CP-RX™: H: 1.394" (35mm) x W: 10.118" (256mm) x D: 4.484" (114mm)