




RemoteTableKit™ RTK-AM1™ Application Guide

Updated: 02/24/2025

RTK-AM1™ Transmitter Module



*Cables Included with Cisco Mic Pro and Navigator




RCC-M015-2.0M
USB-C to USB-C USB Cable

WPS-48V270W 48VDC
100-240V 47-63Hz
Power Supply

SCTLInk3™ Cable
Refer to the RTK-AM1 data sheet for cable specifications

RTK-AM1™ Receiver Module

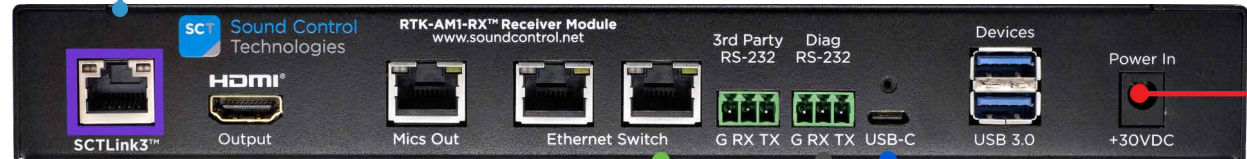

WPS-12 30VDC
100-240V 47-63Hz
Power Supply

RCC-H016-1.0M
RJ45 to RJ45 UTP Cable

RCC-M015-1.0M
USB-C to USB-C USB Cable

RCC-M013-1.0M
3Pin to USB-A Cable



Cisco Codec EQ, Room Bar & Room Bar Pro

Note: DIP switch position 1 on the Receiver must be in the on position to enable Cisco communications.

*The Cisco Codec EQ, Room Bar, and Room Bar Pro do not support audio from Alt-Mode signals on their USB-C connectors. As a result these devices will not produce audio when HDMI inputs on the RTK-AM1 transmitter module have been selected.