





Cisco Codec Plus

**RCC-M005-1.0M**  
USB-A (RTK-MINI-RX™) to USB-C (Capture Device)



**RCC-H016-1.0M**  
RJ45 to RJ45 UTP Control Cable

**RCC-H001-1.0M**  
HDMI to HDMI Video Cable

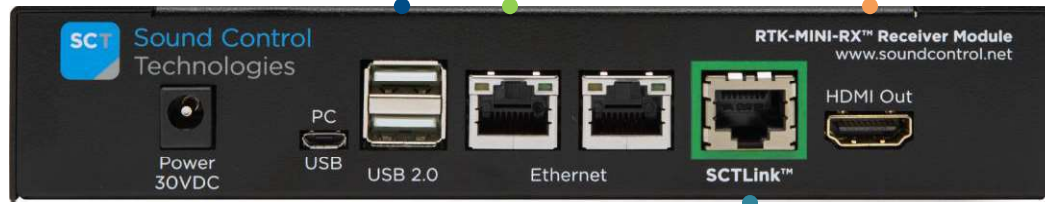

**RTK-MINI-RX™**  
Receiver Module

**SCTLink™ Cable**  
Ethernet/POE | HDMI | USB

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.



Cisco Navigator or Touch 10



**RTK-MINI-TX™**  
Transmitter Module


**RCC-H001-2.0M**  
HDMI to HDMI Video Cable

**RCC-M006-2.0M**  
USB Micro-B (RTK-MINI-TX™) to USB-A



Laptop

**SCTLink™ Cable Specs**  
Integrator-Supplied CAT6 STP/UTP Cable  
T568A or T568B (10m-100m min/max Length)

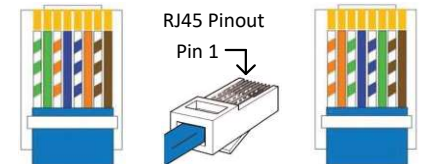

**Module Dimensions**

RTK-MINI-TX™: **H:** 1.394" (35mm) x **W:** 7.283" (185mm) x **D:** 4.484" (114mm)  
RTK-MINI-RX™: **H:** 1.394" (35mm) x **W:** 7.283" (185mm) x **D:** 4.484" (114mm)RCC-M006-1.0M