




Cisco Room Bar



RTK-MINI-RX™ Receiver Module

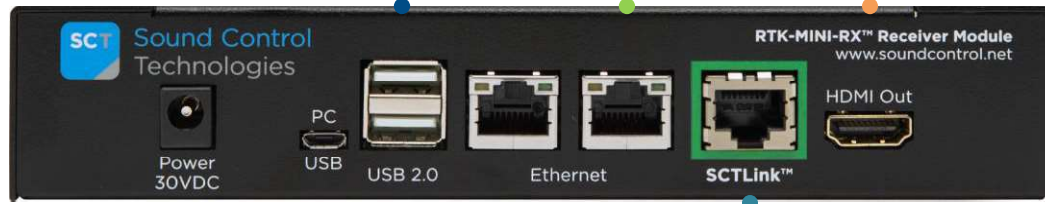

RTK-MINI-TX™ Transmitter Module



Cisco Navigator or Touch 10



Laptop

- RCC-H016-1.0M  
RJ45 to RJ45 UTP Control Cable
- RCC-H001-1.0M  
HDMI to HDMI Video Cable
- RCC-M005-1.0M  
USB-A (RTK-MINI-RX™) to USB-C


SCTLink™ Cable  
Ethernet/POE | HDMI | USB

The SCTLink™ cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

RCC-H001-2.0M  
HDMI to HDMI Video Cable

RCC-M006-2.0M  
USB Micro-B (RTK-MINI-TX™) to USB-A

SCTLink™ Cable Specs  
Integrator-Supplied CAT6 STP/UTP Cable  
T568A or T568B (10m-100m min/max Length)

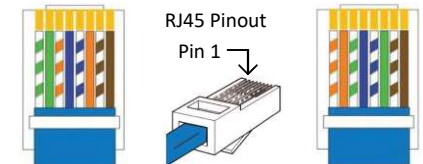

### Module Dimensions

RTK-MINI-TX™: H: 1.394" (35mm) x W: 7.283" (185mm) x D: 4.484" (114mm)

RTK-MINI-RX™: H: 1.394" (35mm) x W: 7.283" (185mm) x D: 4.484" (114mm)RCC-M006-1.0M