





Neat Bar

RCC-M005-0.3M  
USB-A (RTK-MINI-RX™) to USB-C

RCC-C001-0.3M  
HDMI to HDMI Video Cable

RCC-C002-0.3M  
RJ45 to RJ45 UTP Control Cable

 \*Can be used on Tx or Rx.\*  
WPS-12 30VDC  
100-240V 47-63Hz  
Power Supply

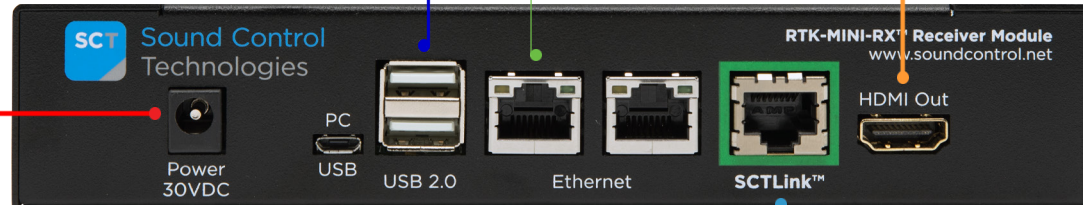


RTK-MINI-RX™  
Receiver Module

SCTLink™ Cable  
Ethernet/POE | HDMI | USB  
The SCTLink™ cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

RCC-H016-1.0M  
RJ45 to RJ45 UTP Control Cable



Neat Pad  
Ethernet/POE  
\*Neat Provided\*

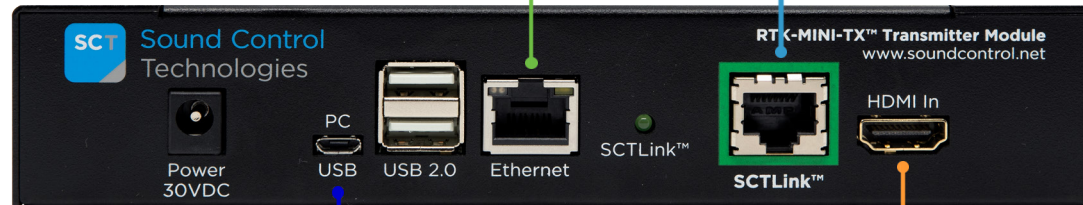

RTK-MINI-TX™  
Transmitter Module

RCC-M006-1.0M  
USB Micro B (RTK-MINI-TX™) to USB-A





Laptop

RCC-H001-1.0M  
HDMI to HDMI Video Cable

### SCTLink™ Cable Specs

Integrator-Supplied CAT6 STP/UTP Cable  
T568A or T568B (10m-100m min/max Length)



### Module Dimensions

RTK-MINI-TX™: **H:** 1.394" (35mm) x **W:** 7.283" (185mm) x **D:** 4.484" (114mm)

RTK-MINI-RX™: **H:** 1.394" (35mm) x **W:** 7.283" (185mm) x **D:** 4.484" (114mm)