



### RTK-X57 Transmitter™ Module



Poly Expansion Mic  
\*Cable Poly Provided\*



RCC-M006-2.0M  
USB-A to USB-B Micro

SCTLINK™ Cable\*  
Ethernet; HDMI; Audio I/O & USB  
up to 100m CAT5e/CAT6  
The SCTLINK™ cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

\*Can be used on Tx or Rx.\*


WPS-12 30VDC  
100-240V 47-63Hz  
Power Supply



### RTK-X57 Receiver™ Module



\*SCTLINK™ Cable Specs  
Integrator-Supplied CAT5e/CAT6 STP/UTP Cable  
EIA568A or EIA568B (10m-100m min/max Length)

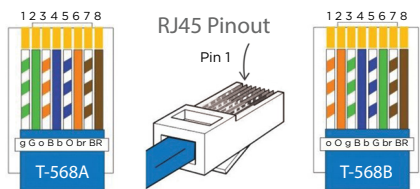

Monitor  
HDMI Cable  
\*Purchased Separately\*

RCC-M005-1.0M  
USB-A to USB-C

RCC-M010-1.0M  
Microphone Cable



Poly Studio USB Video Bar

### Module Dimensions

RTK-X57-TX™: H: 1.39" (35mm) x W: 10.22" (259mm) x D: 4.51" (114mm)

RTK-X57-RX™: H: 1.39" (35mm) x W: 10.22" (259mm) x D: 4.51" (114mm)