

Cisco SpeakerTrack 60

Important: Due to the power demands of Cisco's SpeakerTrack 60, it is best practice to utilize SCT's provided **RC-RKL™** rack shelf to facilitate ventilation.



Cisco Precision 60

SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable EIA568A/EIA568B (10m-100m min/max Length)

The **SCTLink™ Cable** must always be a single, point-to-point CAT cable with no couplers or interconnections.

[2] RCC-H016
3' UTP Cables

RCC-C001
1' HDMI Cable

RCC-C002
1' UTP Cable

PPC-003
1' Power Cable

SCTLink™ Cable
Power, Control & Video




RC5-CE™



RC6-CE™



RC6-HE™

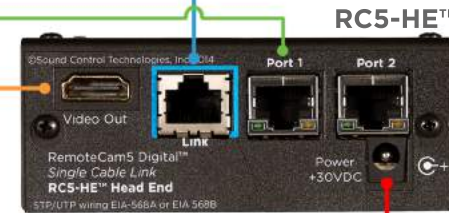

RC5-HE™

PPC-010-1M
3' Power Cable

WPS-48 48VDC
100-240V~47-63Hz
Power Supply


[3] RCC-H001
3' HDMI Cables

WPS-12 30VDC
100-240V 47-63Hz
Power Supply

RCC-H016
3' UTP Cable

[2] RCC-C011
3' HDMI Cables
270° Connector

Cisco Touch10
Ethernet/POE (Cisco Provided)

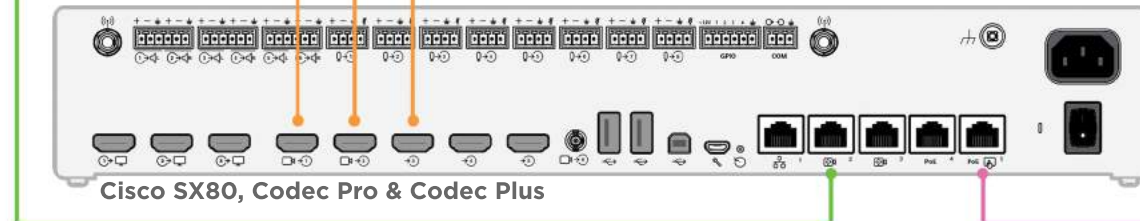

Cisco SX80, Codec Pro & Codec Plus

