




RemoteTableKit™ RTK-PLUS™ Application Guide

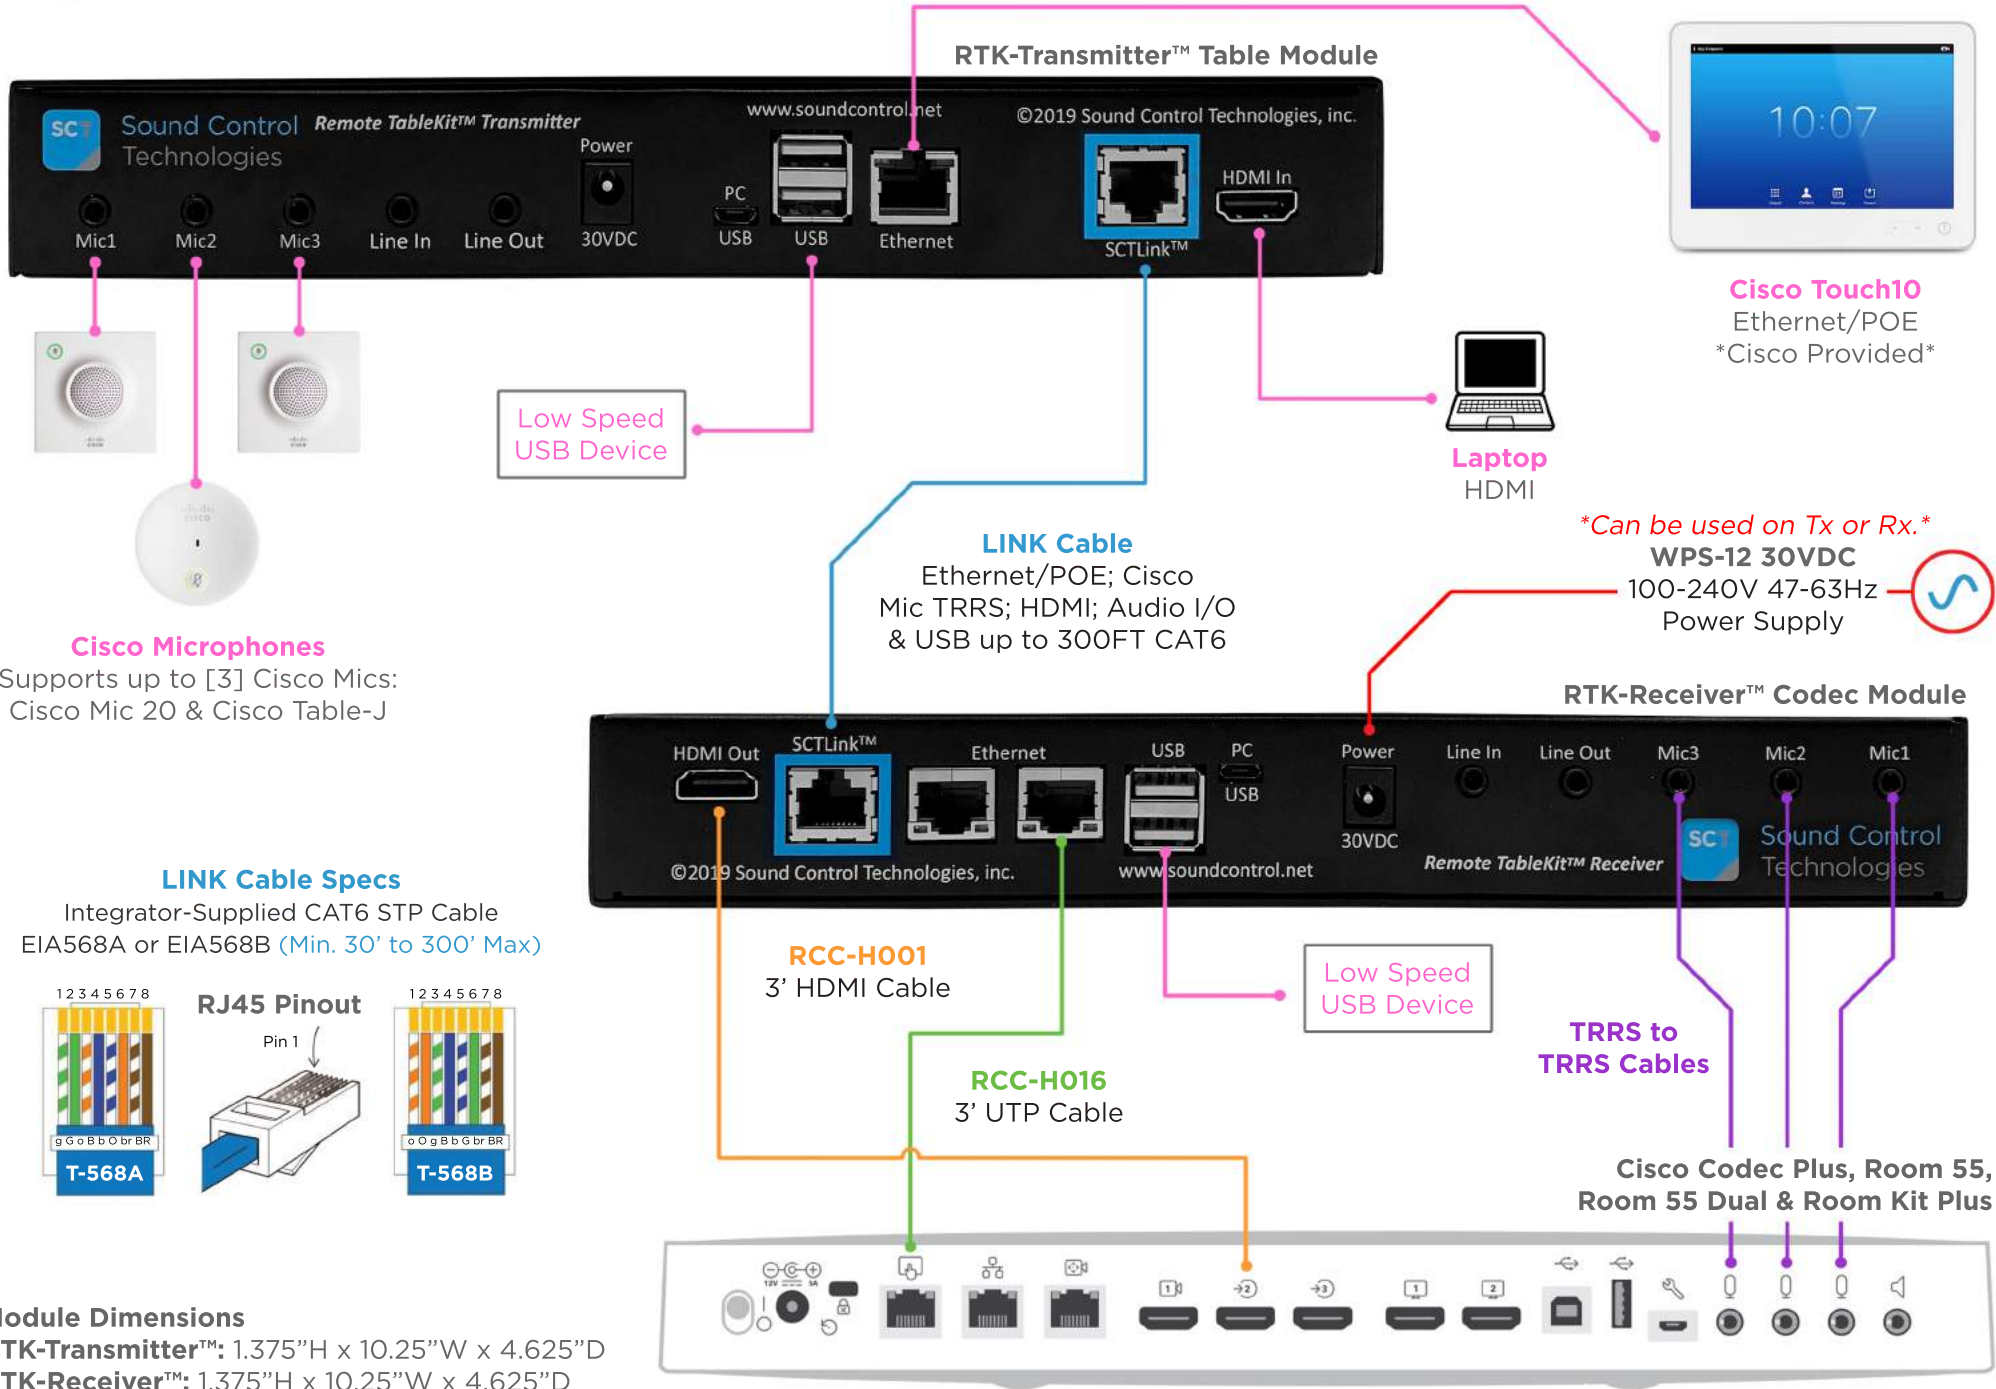

Low Speed USB Device

Cisco Touch10 Ethernet/POE *Cisco Provided*


Laptop HDMI

Can be used on Tx or Rx.
WPS-12 30VDC
100-240V 47-63Hz
Power Supply

Cisco Microphones
Supports up to [3] Cisco Mics:
Cisco Mic 20 & Cisco Table-J

LINK Cable Specs

Integrator-Supplied CAT6 STP Cable
EIA568A or EIA568B (Min. 30' to 300' Max)

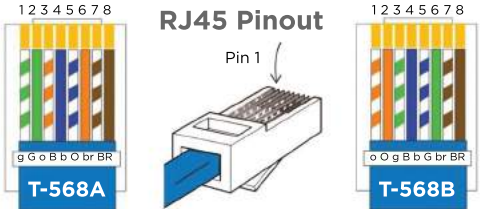

RCC-H001
3' HDMI Cable

RCC-H016
3' UTP Cable

Low Speed USB Device

TRRS to TRRS Cables

Cisco Codec Plus, Room 55,
Room 55 Dual & Room Kit Plus

Module Dimensions

RTK-Transmitter™: 1.375"H x 10.25"W x 4.625"D
RTK-Receiver™: 1.375"H x 10.25"W x 4.625"D