





RemoteTableKit™ RTK-PRO™ Application Guide

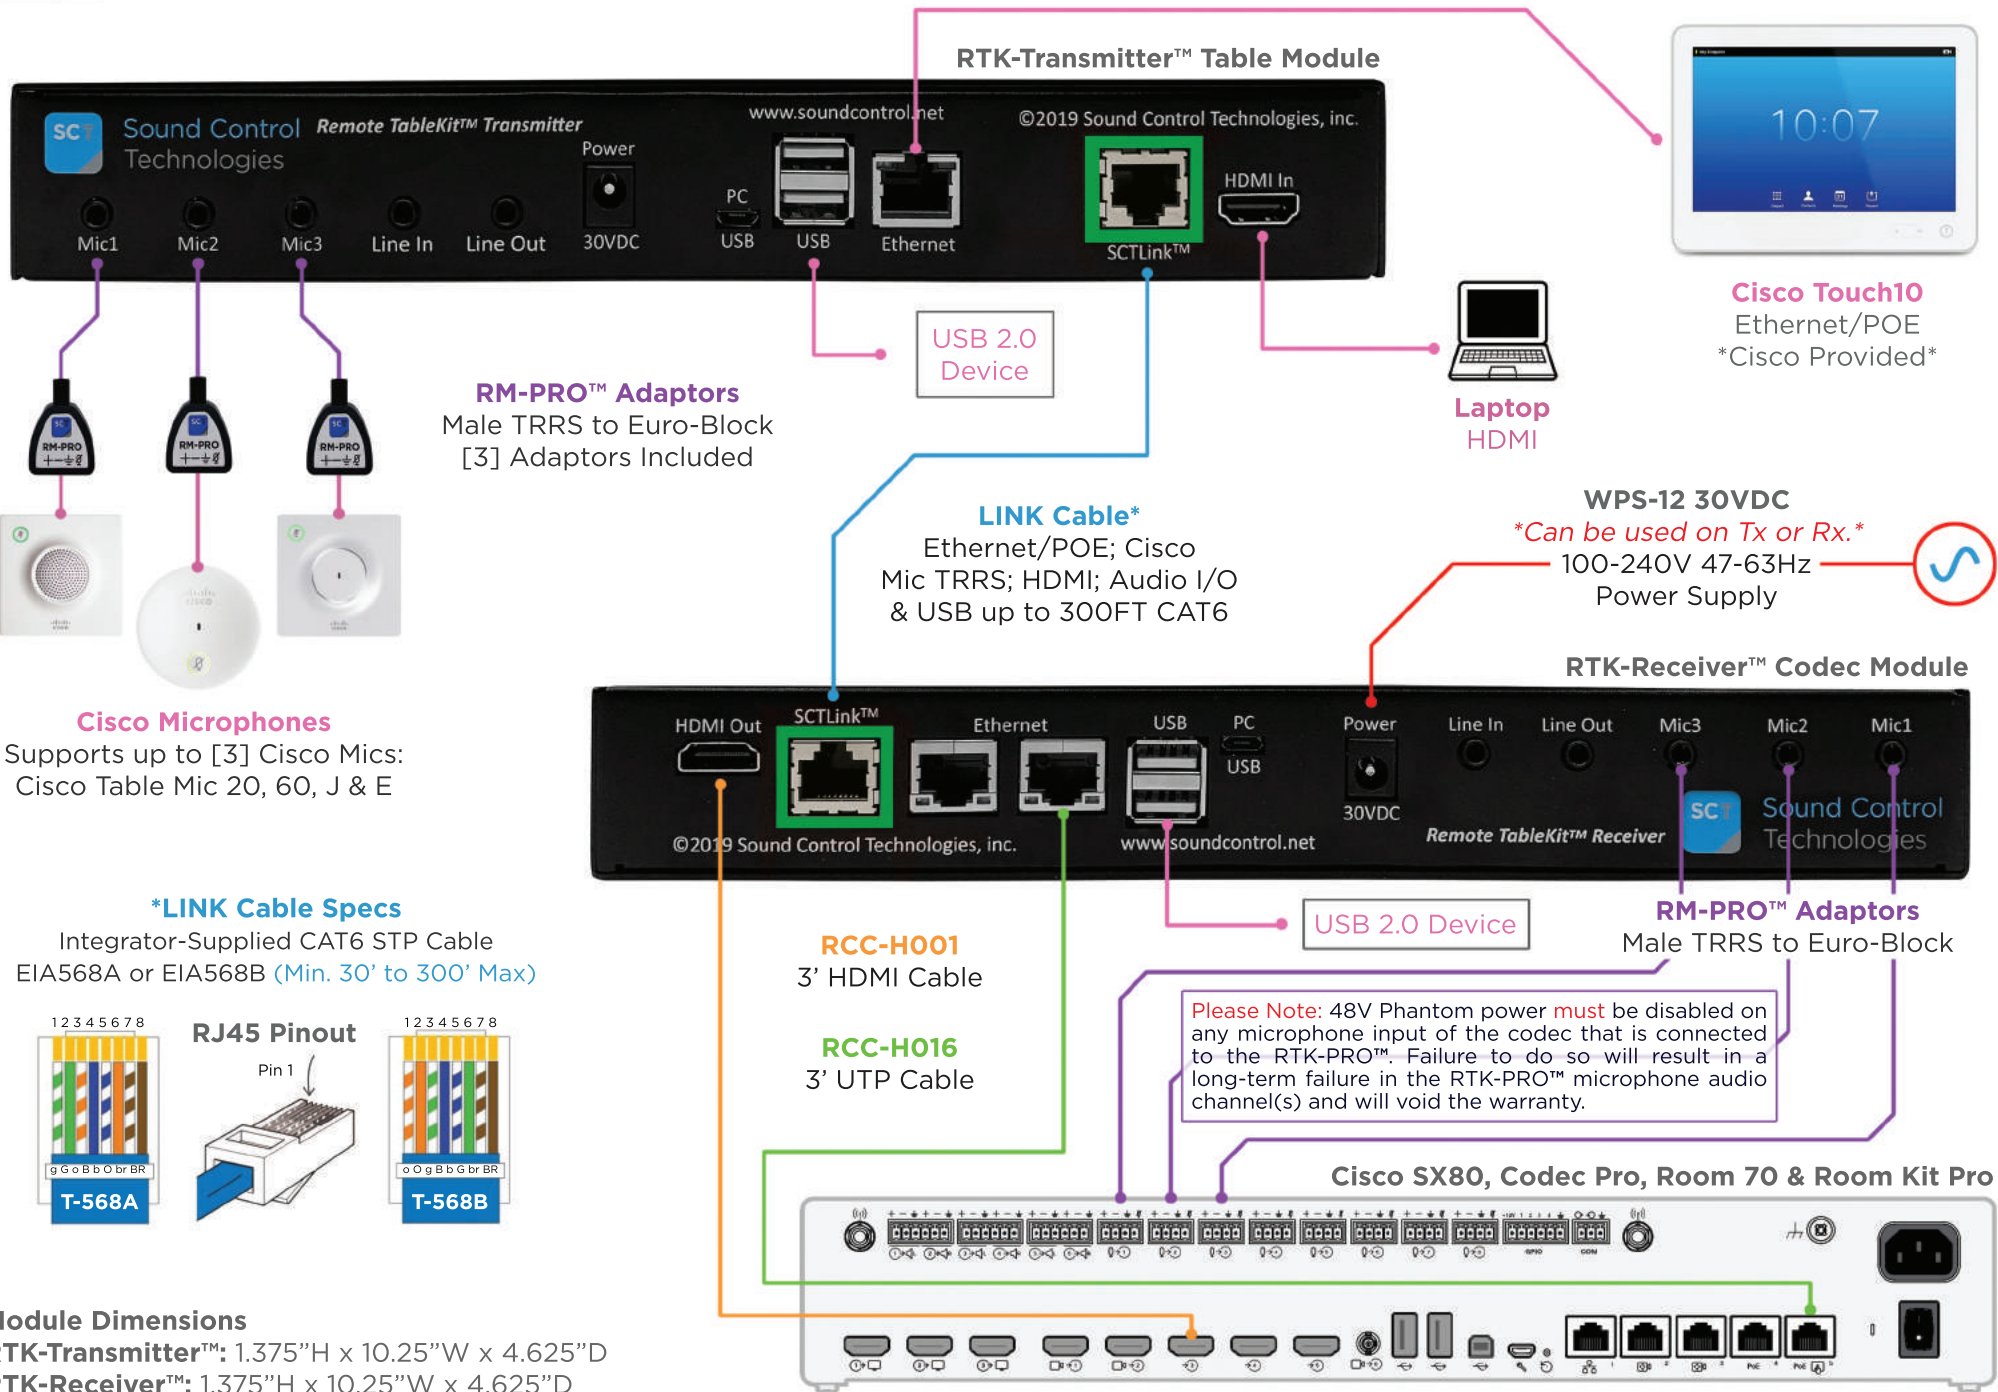

RM-PRO™ Adaptors
Male TRRS to Euro-Block
[3] Adaptors Included

Cisco Microphones
Supports up to [3] Cisco Mics:
Cisco Table Mic 20, 60, J & E

***LINK Cable Specs**
Integrator-Supplied CAT6 STP Cable
EIA568A or EIA568B (Min. 30' to 300' Max)

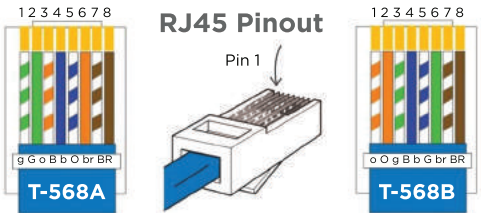

Module Dimensions
RTK-Transmitter™: 1.375"H x 10.25"W x 4.625"D
RTK-Receiver™: 1.375"H x 10.25"W x 4.625"D

Please Note: 48V Phantom power **must** be disabled on any microphone input of the codec that is connected to the RTK-PRO™. Failure to do so will result in a long-term failure in the RTK-PRO™ microphone audio channel(s) and will void the warranty.