



Poly EagleEyeIV USB

PPC-013-0.4M
RJ11 (RCU2-CE™) to right angle
5.5 x 2.5mm COAX (Poly)
(Center Negative COAX)

RCC-M004-0.3M
USB-A (RCU2-CE™) to
USB-B (Poly)



RCU2-CE™




Laptop

RCC-M004-1.0M
USB-B (RCU2-HE™) to
USB-A (Computer)



WPS-12 30VDC
100-240V 47-63Hz
Power Supply

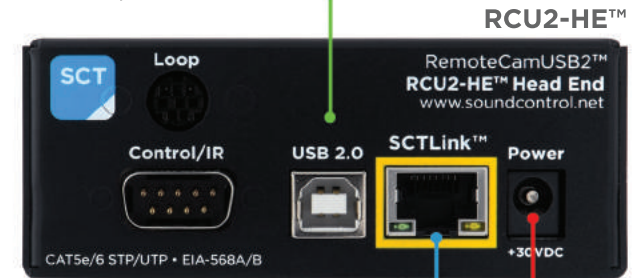

RCU2-HE™


SCTLink™ Cable

Power, Control & Video

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
EIA568A or EIA568B (10m-100m min/max Length)



Module Dimensions

RCU2-CE™: 2.264" W x 0.789"H x 3.725"D

RCU2-HE™: 3.8"W x 1.5"H x 3.814"D