

The **RCU2-BA8™** supports multiple camera models:

- ClearOne Unite 150
- Huddlecam HC20X
- Minrray UV950A
- VDO360 Saber20X NDI
- VHD VX110
- ClearOne Unite 200
- Huddlecam HC30X
- PTZ Optics 12X USB
- VDO360 CompassX
- VHD VX710N
- Huddlecam HC10X-GY
- Lumens VC-B30U
- PTZ Optics 20X USB
- VHD V71U2
- VHD VX701L
- Huddlecam HC20X-GY/WH
- Marshall CV610-UB
- Sony SRG-120DU
- VHD V20C
- VHD VX120




**RCC-M004-0.3M**  
USB-A (RCU2-CE™) to USB-B

**RCC-C005-0.3M**  
RJ45 (RCU2-CE™) Y Cable to 4mm Power Barrel to 8 Pin Mini Din

**RCC-C006-0.4M\***  
RJ11 (RCU2-CE™) to 8 Pin Mini Din  
*\*Purchased Separately: Cable required for VISCA Loop or Daisy Chain Functionality*


**RCC-M004-1.0M**  
USB-B (RCU2-HE™) to USB-A

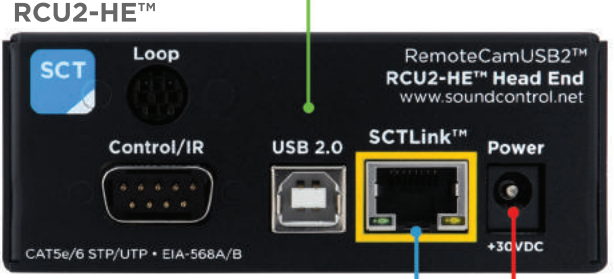


**SCTLink™ Cable**  
Power, Control & Video

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

**WPS-12 30VDC**  
100-240V 47-63Hz  
Power Supply

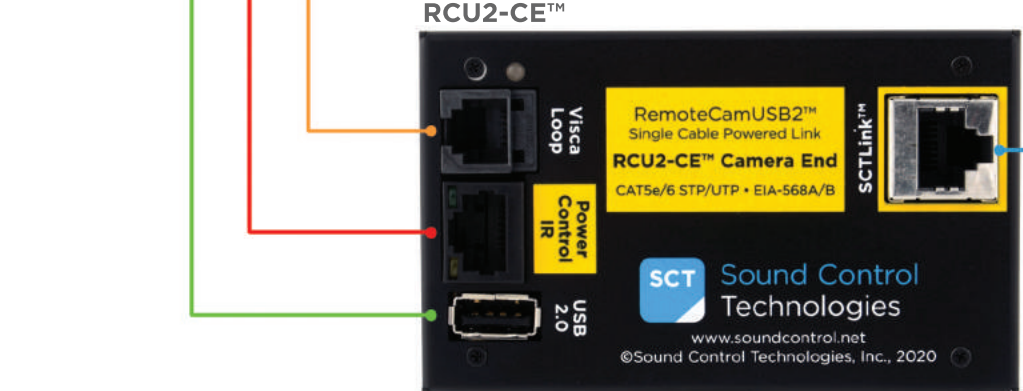

**SCTLink™ Cable Specs**  
Integrator-Supplied CAT5e/CAT6 STP/UTP Cable  
EIA568A or EIA568B (10m-100m min/max Length)

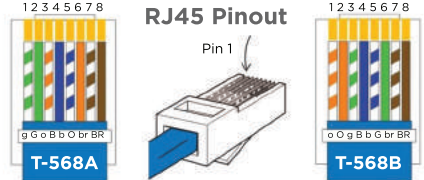

**Module Dimensions**  
**RCU2-CE™:** 2.264" W x 0.789"H x 3.725"D  
**RCU2-HE™:** 3.8"W x 1.5"H x 3.814"D

