

RCU2-C00™ USB Application Guide

Updated: 3/17/2021


The **RCU2-C00™** supports multiple camera models:

- Aver CAM 340+
- Huddly IQ
- Huddly GO
- Jabra Panacast 3
- Lumens VC-B11U
- Panasonic AW-UE4
- Poly G7500 Codec
- VDO360 3SEE


Shown: **Poly G7500 Codec**



RCC-M005-0.3M
USB-A (RCU2-CE™) to USB-C

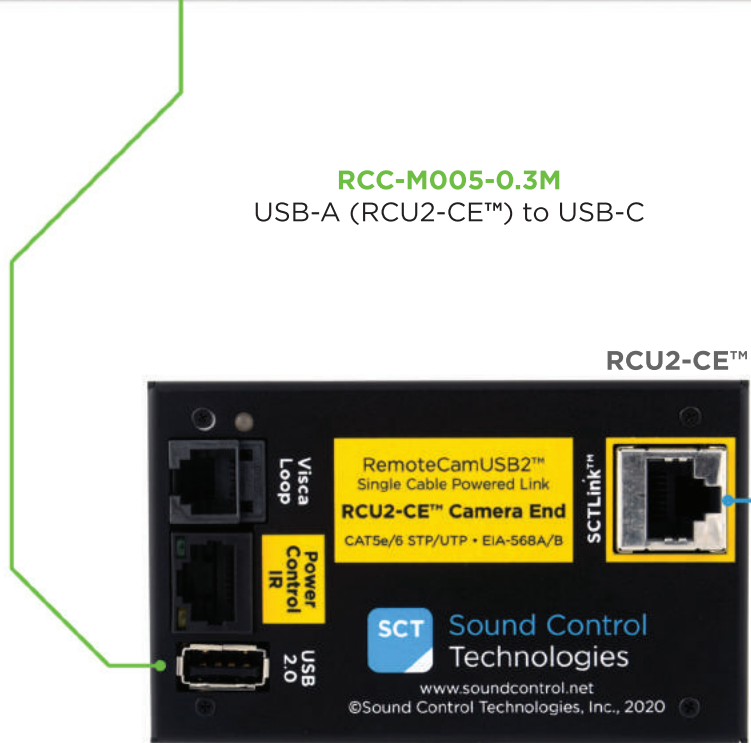

RCC-M004-1.0M
USB-B (RCU2-HE™) to USB-A

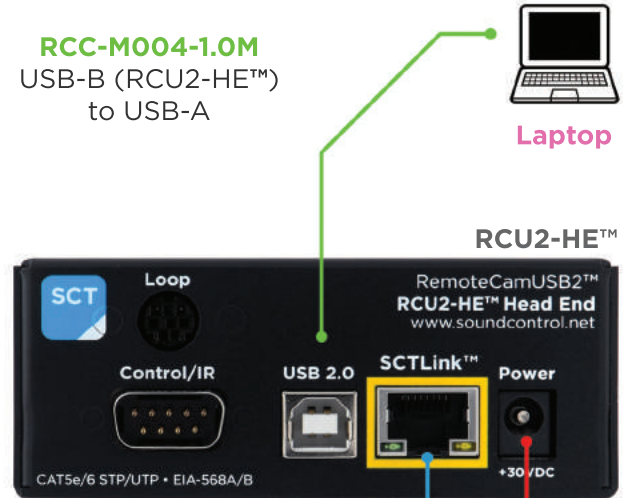


SCTLink™ Cable
Power, Control & Video
The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

WPS-12 30VDC
100-240V 47-63Hz
Power Supply



SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
EIA568A or EIA568B (10m-100m min/max Length)

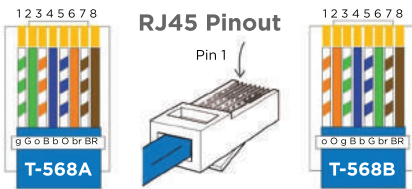

Module Dimensions
RCU2-CE™: 2.264" W x 0.789"H x 3.725"D
RCU2-HE™: 3.8"W x 1.5"H x 3.814"D