



Poly EagleEye Cube

RCC-M004-0.3M

USB-A (RCU2-CE™) to USB-B (Poly) 5VDC

If USB is sole connection between the camera and RCU2-CE™, then **up to** 1.2 Amperes/6 Watts is supported.




RCU2-CE™



Laptop

RCC-M004-1.0M

USB-B (RCU2-HE™) to USB-A (Computer)

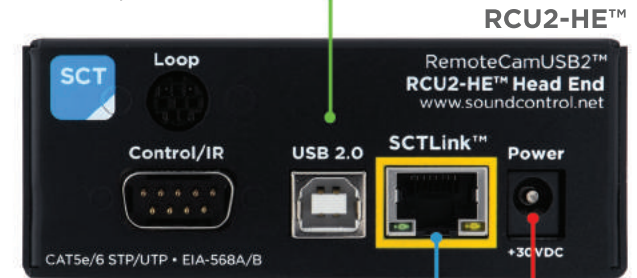

RCU2-HE™



WPS-12 30VDC
100-240V 47-63Hz
Power Supply


SCTLink™ Cable

Power, Control & Video

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
EIA568A or EIA568B (10m-100m min/max Length)



Module Dimensions

RCU2-CE™: 2.264" W x 0.789"H x 3.725"D

RCU2-HE™: 3.8"W x 1.5"H x 3.814"D