




ClearOne Unite 200



SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
T568A or T568B (10m-100m min/max Length)




SCTLink™ Cable


Power, Control & Video

The SCTLink™ cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

RCC-C005-0.3M
RJ45 (RC4-CE™) Y Cable
to 4mm Power Barrel
to 8-Pin Mini Din

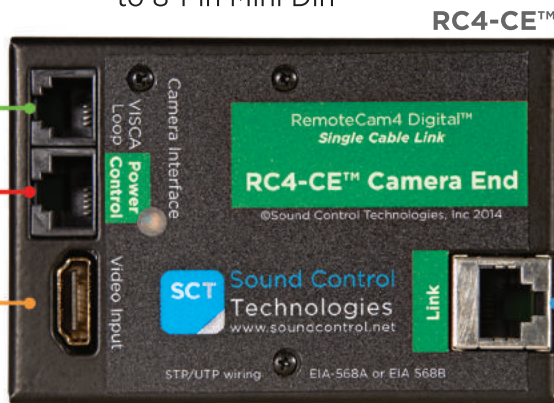

RC4-HE™

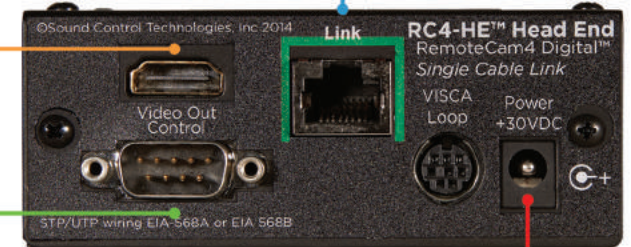

RCC-C001-0.3M
HDMI to HDMI
Video Cable

RCC-C006-0.3M
RJ11 to 8-Pin Mini Din
VISCA Loop Cable

RCC-H001-1.0M
HDMI to HDMI
Video Cable

RCC-H010-2.0M
DB9-F to DB9-F
Control Cable

WPS-12 30VDC
100-240V 47-63Hz
Power Supply



ClearOne Collaborate Pro 600 + 900



Module Dimensions

RC4-CE™: H: 0.93" (23mm) x W: 2.5" (63mm) x D: 3.741" (95mm)

RC4-HE™: H: 1.504" (38mm) x W: 3.813" (96mm) x D: 3.617" (91mm)