

The **RC5-UNI™** supports multiple camera models:


- Aver TR320
- Lumens VC-A71P
- Minrray UV401A
- PTZ Optics PT30X-SDI
- Sony SRG-300H
- Aver TR530
- Lumens VC-A61P
- Minrray UV 540-05/10-HDMI
- QSC Q-SYS PTZ 12x72
- Sony SRG-360SHE
- Lumens VC-A50PN
- Marshall CV630
- PTZ Optics PT12X-SDI
- QSC Q-SYS PTZ 20x60
- Sony SRG-X120
- Lumens VC-A50P
- Marshall CV730
- PTZ Optics PT20X-SDI
- Sony SRG-120DH
- VDO360 Saber20X NDI

Shown: **Sony SRG-X120**




SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable T568A or T568B (10m-100m min/max Length)

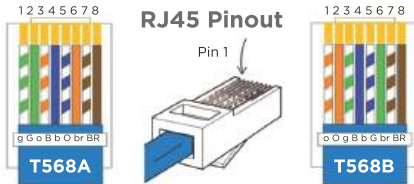

RCC-H001-1.0M
HDMI to HDMI Video Cable

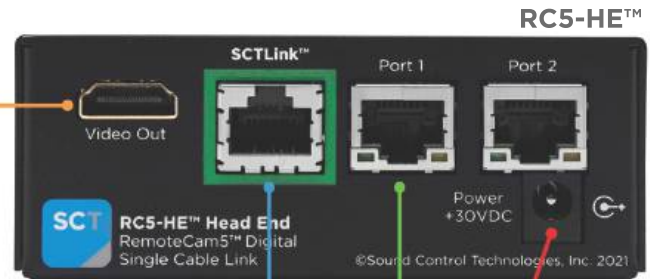

RCC-C001-0.3M
HDMI to HDMI Video Cable

RCC-C002-0.3M
RJ45 to RJ45 UTP Control Cable

PPC-004-0.4M
Power Cable


SCTLink™ Cable
Power, Control & Video
The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

RCC-H016-1.0M
RJ45 to RJ45
UTP Control Cable

WPS-12 30VDC
100-240V 47-63Hz
Power Supply

Sony RM-IP10 Joystick
or Generic Controller

Sony 120V
Power Supply

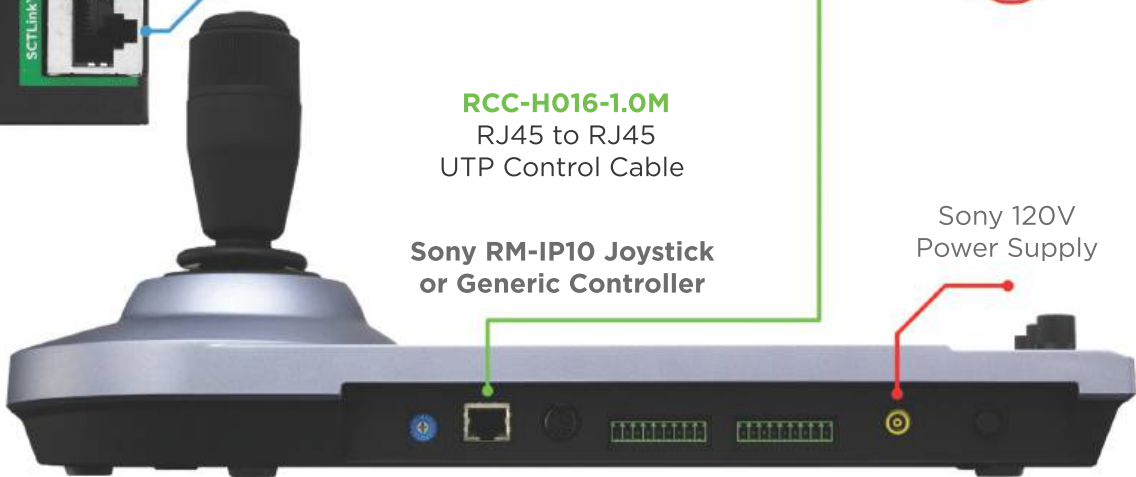

Module Dimensions

RC5-CE™: H: 0.93" (23mm) x W: 2.5" (63mm) x D: 3.741" (95mm)

RC5-HE™: H: 1.504" (38mm) x W: 3.813" (96mm) x D: 3.617" (91mm)