



Poly EagleEye IV with Producer



Poly Provided Cable

**RCC-C031-0.3M**

HDCI Y Cable to HDMI/RJ45  
(Supplied only with RC4 Producer™ Kit)

**RCC-C029-0.3M**

Power Cable for Producer Module  
(Supplied only with RC4 Producer™ Kit)

### Dipswitch Positions

Please refer to  
RC-SDA™ (2021) FAQ

RC4-CE™



Poly RPA300, RPA500, RPA700 & RPA7500

**RCC-H030-1.0M**


HDCI Y Cable to HDMI/9 Pin Cable  
(Supplied only with RC4 Producer™ Kit)

**RCC-M001-1.0M**


DB9 to DB9 RS232

**RCC-H001-1.0M**

HDMI to HDMI Cable

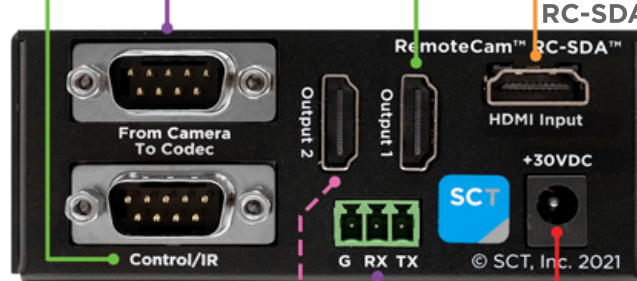

RC-SDA™

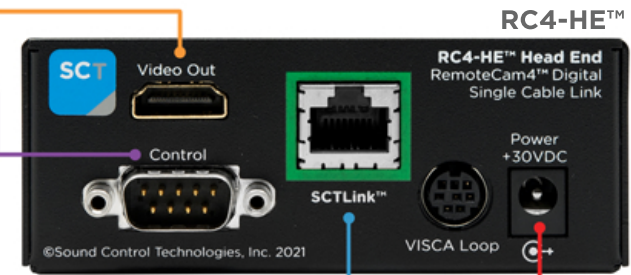

RC4-HE™

**WPS-12 30VDC**  
100-240V 47-63Hz  
Power Supply

**WPS-12 30VDC**  
100-240V 47-63Hz  
Power Supply



Laptop

HDMI to USB Converter


**RCC-M002-1.0M**  
3-Pin Phoenix to DB9-F

### SCTLink™ Cable

Power, Control, Audio & Video  
The SCTLink™ cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

### SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable  
T568A or T568B (10m-100m min/max Length)



### Module Dimensions

RC4-CE™: H: 0.93" (23mm) x W: 2.5" (63mm) x D: 3.741" (95mm)

RC4-HE™/RC-SDA™: H: 1.504" (38mm) x W: 3.813" (96mm) x D: 3.617" (91mm)